


Product Features

- 915.5 MHz Bandpass Filter
- High Rejection
- Low Insertion Loss
- SMA Connector
- Other center frequencies and bandwidths are available. Please consult the factory.


RF Characteristics

Center Frequency[Fo]	915.5MHz
Operating Frequency	902~929MHz
Passband Insertion Loss	0.6dB max.
Passband Ripple	0.2dB max.
Passband Return Loss	15dB min.
Stopband Attenuation	40dB min@DC~762MHz 40dB min@1069~2500MHz
Impedance	50 Ohms
Power	20W
RF Connector	N female / N male
Surface Finish	Sandblasted Silver White
Waterproof	IP67
Operating Temperature	-40°C ~ +70°C
Net Weight	840g

Performance Chart

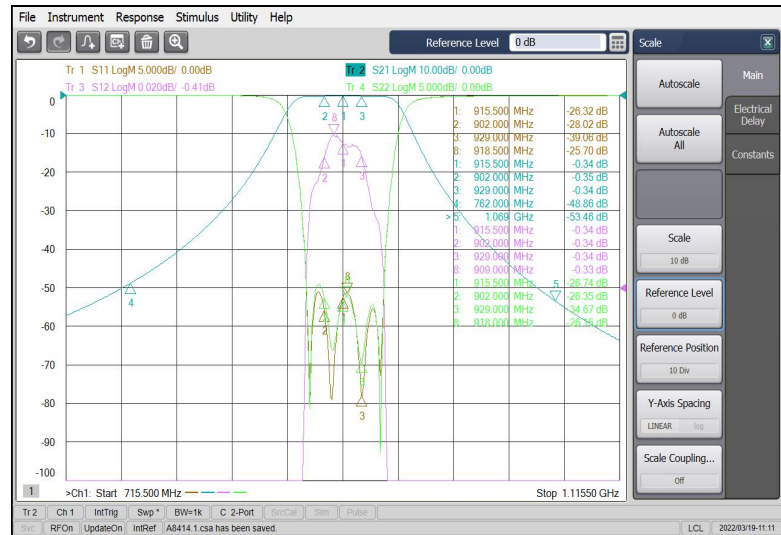

Outline Drawing(mm)

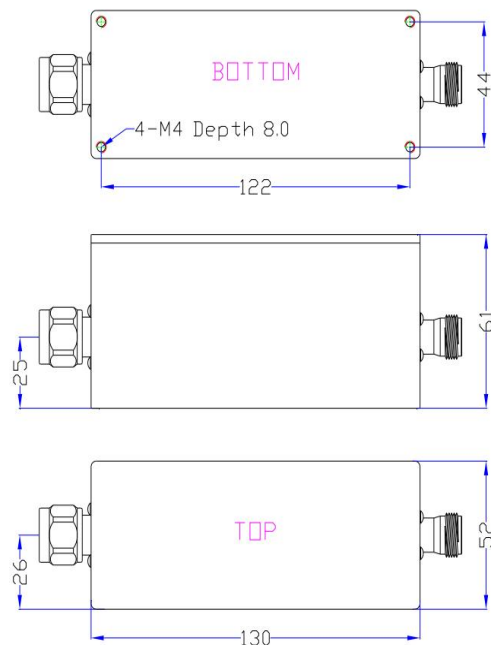

Outline Tolerances ±0.5mm (0.02inch)