




Product Features


- 1200 MHz Bandpass Filter
- High Rejection
- Low Insertion Loss
- SMA Connector
- Other center frequencies and bandwidths are available. Please consult the factory.

Performance Chart

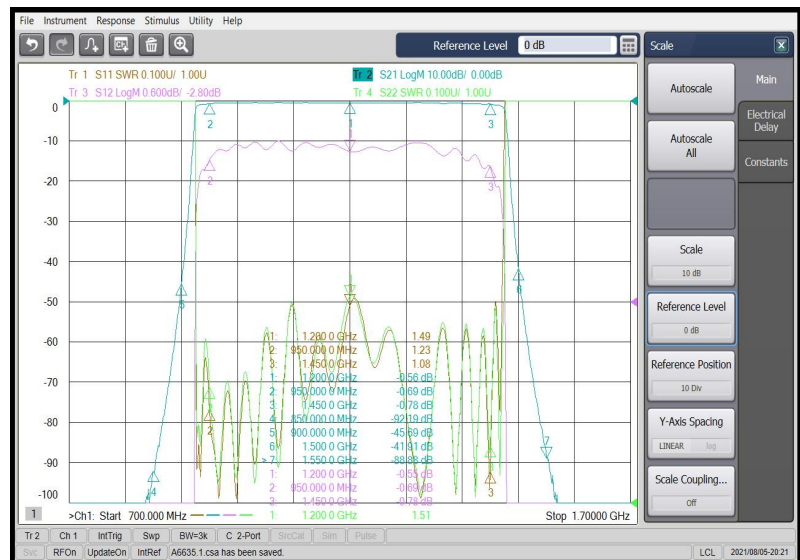

RF Characteristics	
Center Frequency[Fo]	1200MHz
Operating Frequency	950~1450MHz
Passband Insertion Loss	1.0dB max.
Passband Ripple	0.6dB max.
Passband VSWR	1.6 max.
Stopband Attenuation	80dB min@DC~850MHz 35dB min@850~900MHz 30dB min@1500~1550MHz 80dB min@1550~2400MHz
Impedance	50 Ohms
Power	2W
RF Connector	SMA female
Surface Finish	Black Paint
Operating Temperature	-30°C ~ +70°C
Net Weight	170g

Outline Drawing(mm)

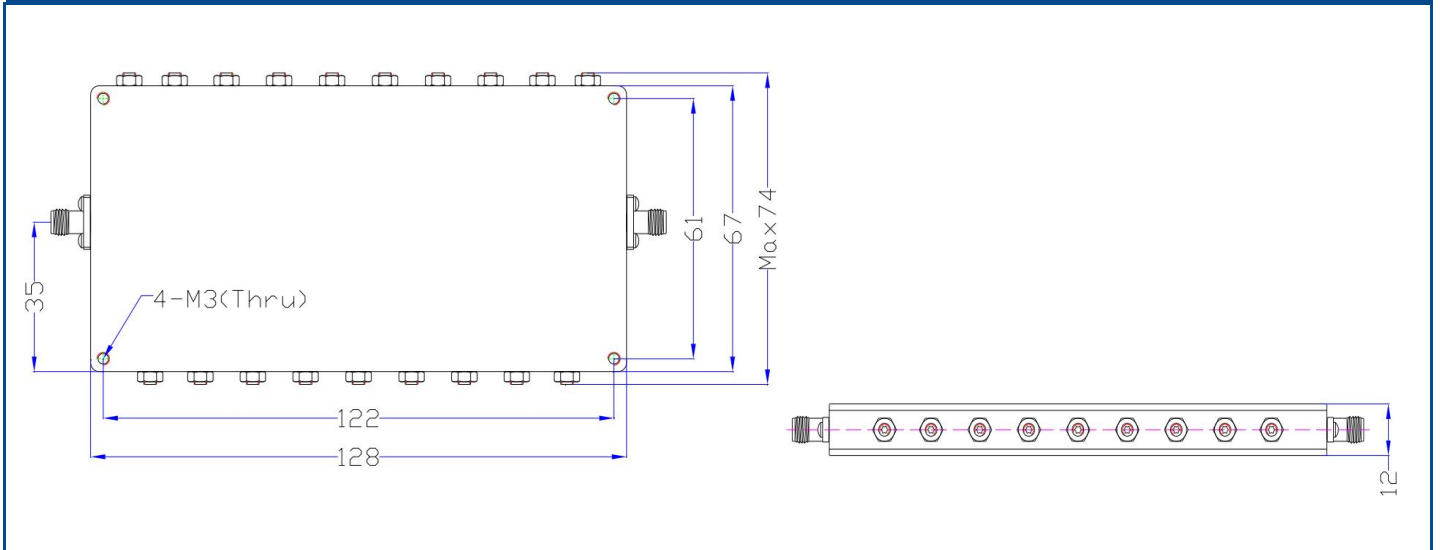

Outline Tolerances ±0.5mm (0.02inch)