




**Product Features**

- 1350 MHz Bandpass Filter
- High Rejection
- Low Insertion Loss
- SMA Connector
- Other center frequencies and bandwidths are available. Please consult the factory.


**RF Characteristics**

|                         |   |
|-------------------------|---|
| Center Frequency[Fo]    | 1350MHz                                     |
| Operating Frequency     | 1000~1700MHz                                |
| Passband Insertion Loss | 1.3dB max.                                  |
| Passband Ripple         | 0.8dB max.                                  |
| Passband VSWR           | 1.7 max.                                    |
| Stopband Attenuation    | 50dB min@DC~900MHz<br>50dB min@1800~2500MHz |
| Impedance               | 50 Ohms                                     |
| Power                   | 2W  |
| RF Connector            | SMA female                                  |
| Surface Finish          | Black Paint                                 |
| Operating Temperature   | -30°C ~ +70°C                               |
| Net Wight               | 121g  |

**Performance Chart**

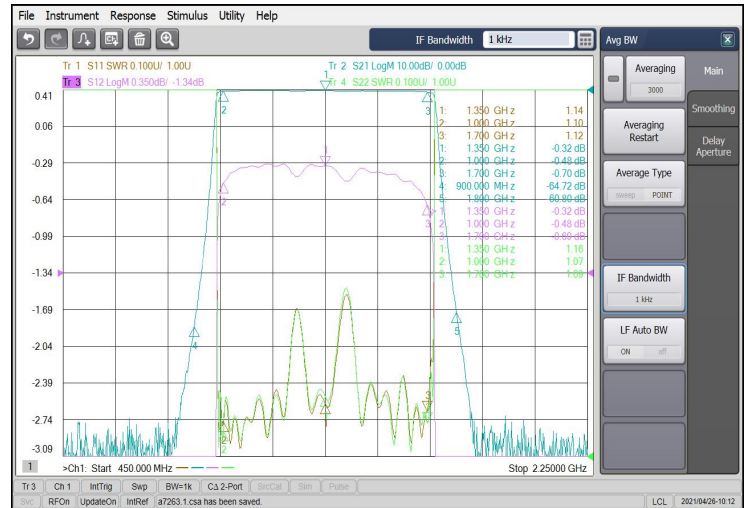

**Outline Drawing(mm)**

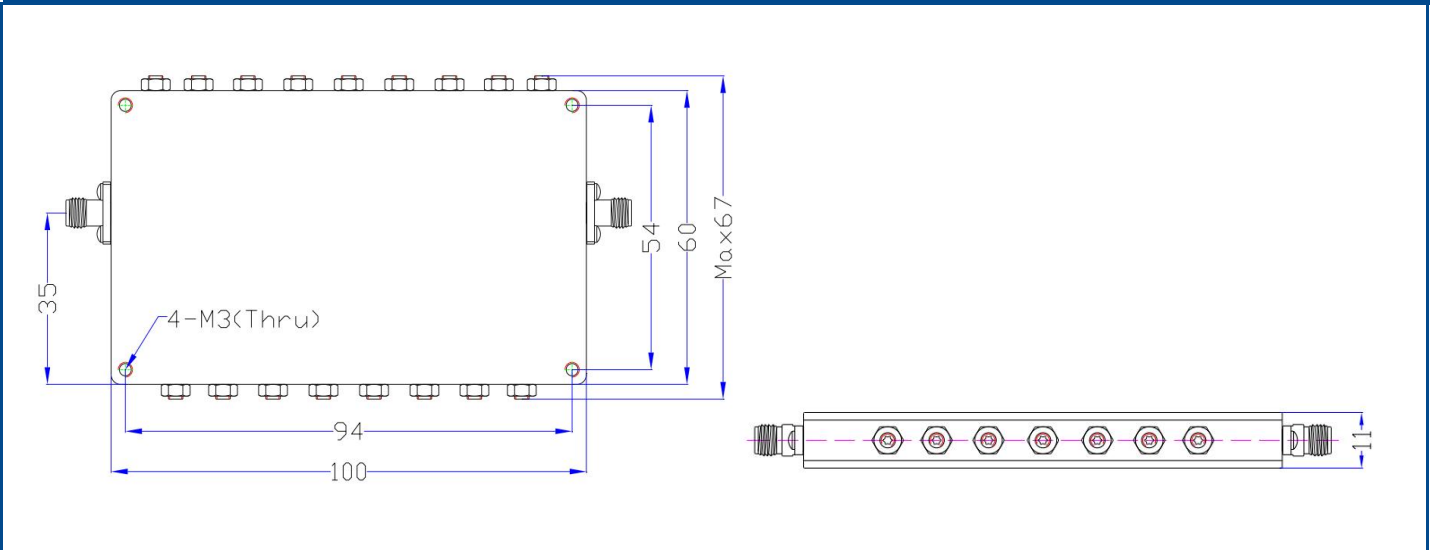

Outline Tolerances ±0.5mm (0.02inch)