




**Product Features**

- 1500 MHz Bandpass Filter
- High Rejection
- Low Insertion Loss
- SMA Connector
- Other center frequencies and bandwidths are available. Please consult the factory.


**RF Characteristics**

Center Frequency[Fo]	1500MHz
Operating Frequency	1200~1800MHz
Passband Insertion Loss	1.3dB max.
Passband Flatness	0.8dB max.
Passband Return Loss	14dB min.
Stopband Attenuation	70dB min@DC~1100MHz 55dB min@1900~3000MHz
Impedance	50 Ohms
Power	2W
RF Connector	SMA female
Surface Finish	Black Paint
Operating Temperature	-30°C ~ +70°C
Net Wight	120g

**Performance Chart**

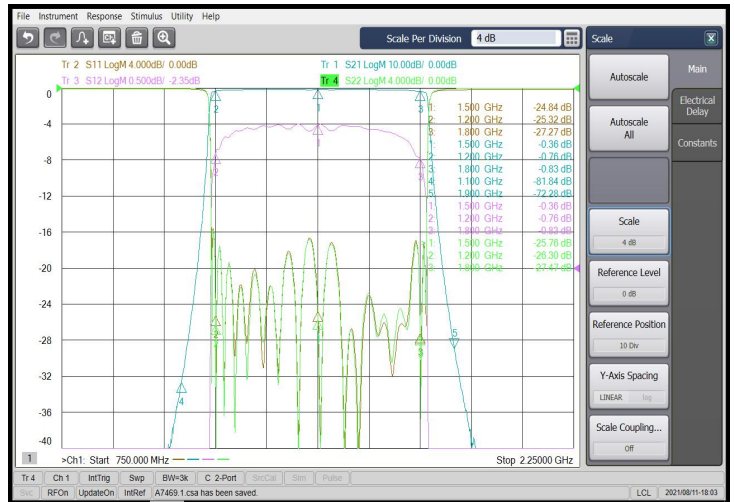

**Outline Drawing(mm)**

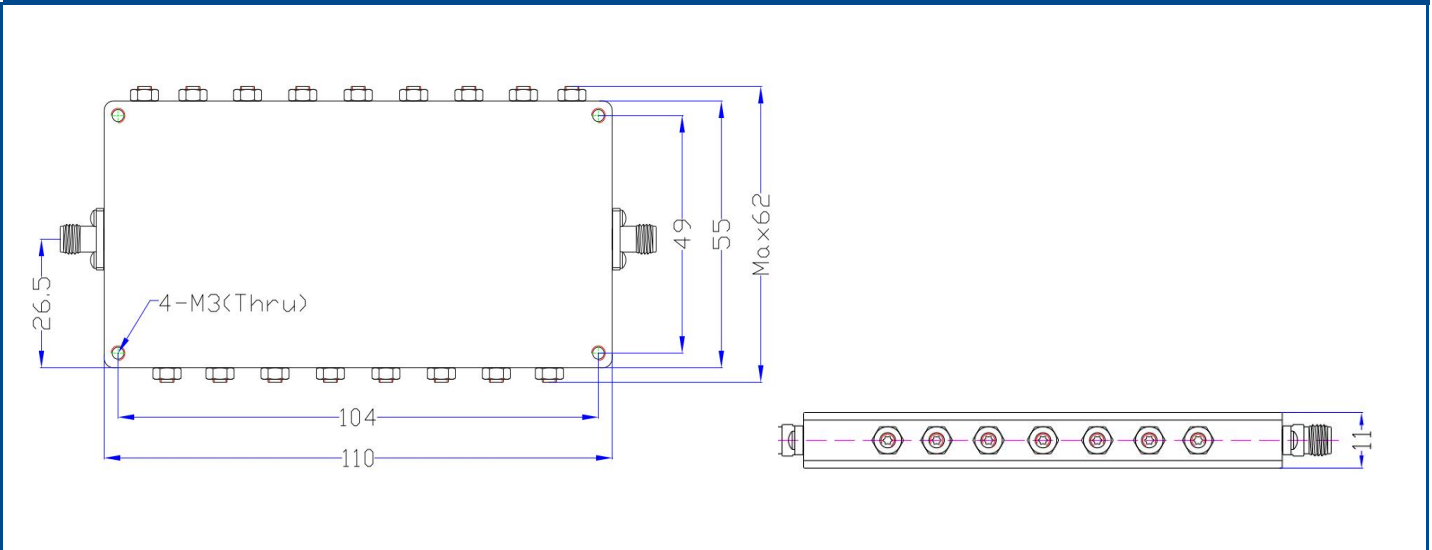

Outline Tolerances ±0.5mm (0.02inch)