




Product Features

- 1515 MHz Bandpass Filter
- High Rejection
- Low Insertion Loss
- SMA Connector
- Other center frequencies and bandwidths are available. Please consult the factory.


RF Characteristics

Center Frequency[Fo]	1515MHz
Operating Frequency	1300~1730MHz
Passband Insertion Loss	1.1dB max.
Passband Ripple	0.6dB max.
Passband VSWR	1.5 max.
Stopband Attenuation	50dB min@DC~1230MHz 30dB min@1230~1250MHz 15dB min@1780~1800MHz 40dB min@1800~3000MHz
Impedance	50 Ohms
Power	2W
RF Connector	SMA female
Surface Finish	Black Paint
Operating Temperature	-30°C ~ +70°C
Net Wight	115g

Performance Chart

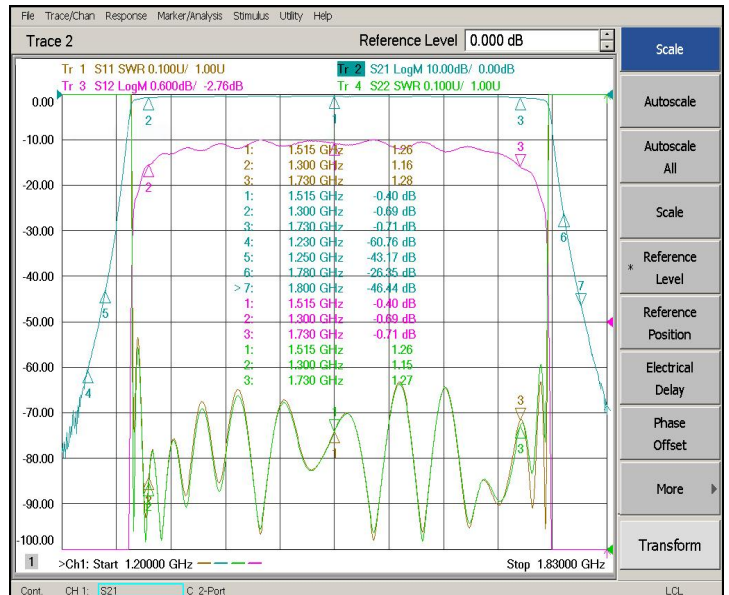

Outline Drawing (mm)

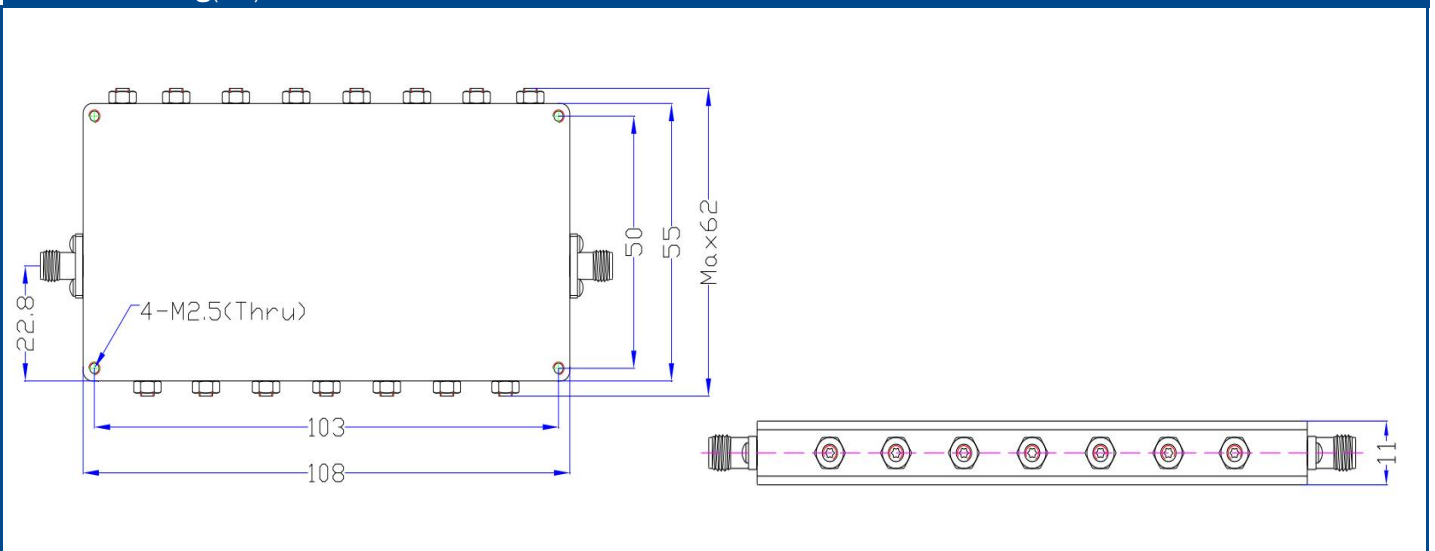

Outline Tolerances ±0.5mm (0.02inch)