




### Product Features

- 1900 MHz Bandpass Filter
- High Rejection
- Low Insertion Loss
- SMA Connector
- Other center frequencies and bandwidths are available. Please consult the factory.


### RF Characteristics

Center Frequency[Fo]	1900MHz
Operating Frequency	1650~2150MHz
Passband Insertion Loss	1.4dB max.
Passband Ripple	0.8dB max.
Passband VSWR	1.6 max.
Stopband Attenuation	80dB min@DC~1550MHz 35dB min@1550~1600MHz 30dB min@2200~2250MHz 80dB min@2250~3500MHz
Impedance	50 Ohms
Power	2W
RF Connector	SMA female
Surface Finish	Black Paint
Operating Temperature	-30°C ~ +70°C
Net Wight	115g

### Performance Chart

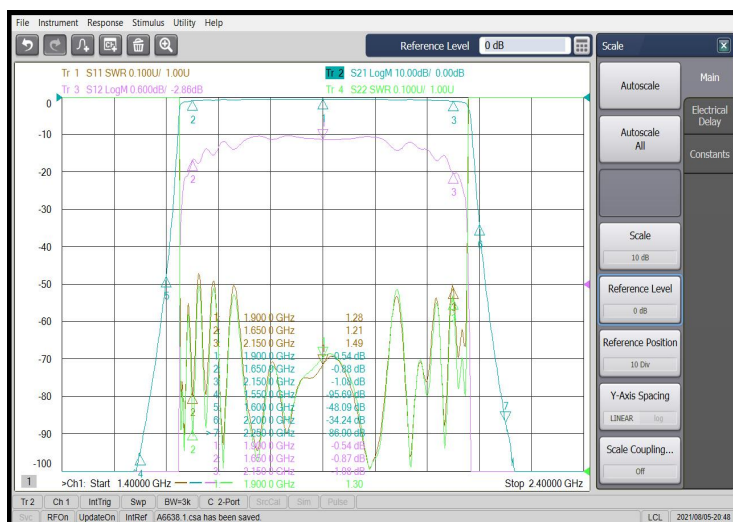

### Outline Drawing(mm)

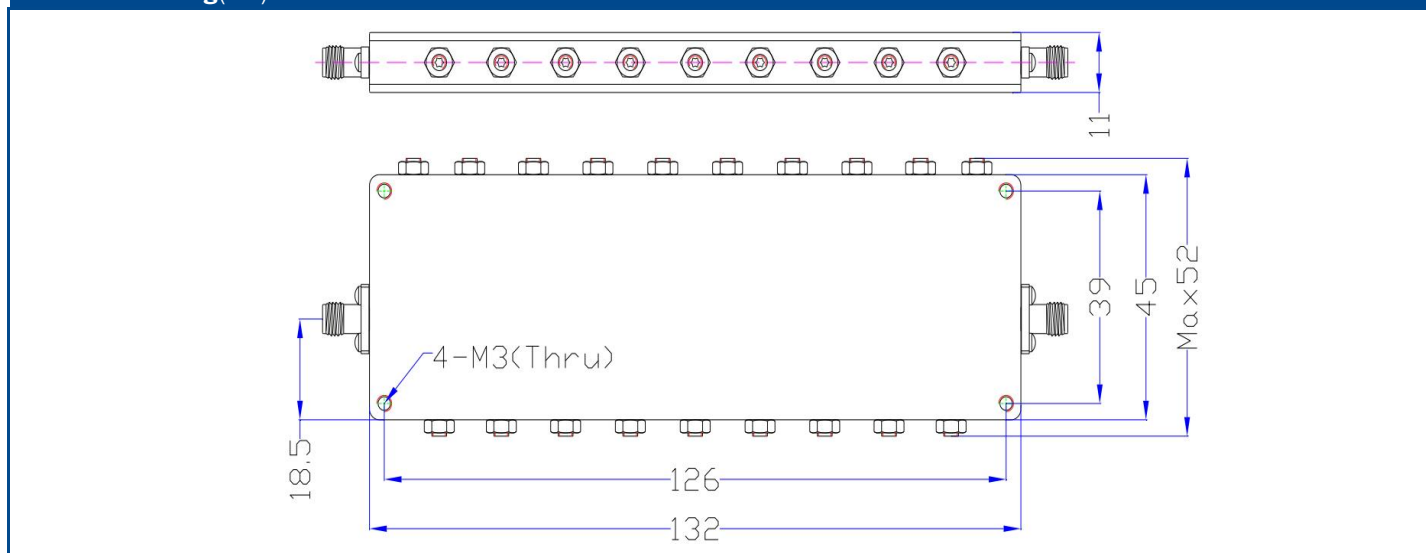

Outline Tolerances ±0.5mm (0.02inch)