




Product Features


- 2250 MHz Bandpass Filter
- High Rejection
- Low Insertion Loss
- SMA Connector
- Other center frequencies and bandwidths are available. Please consult the factory.

Performance Chart

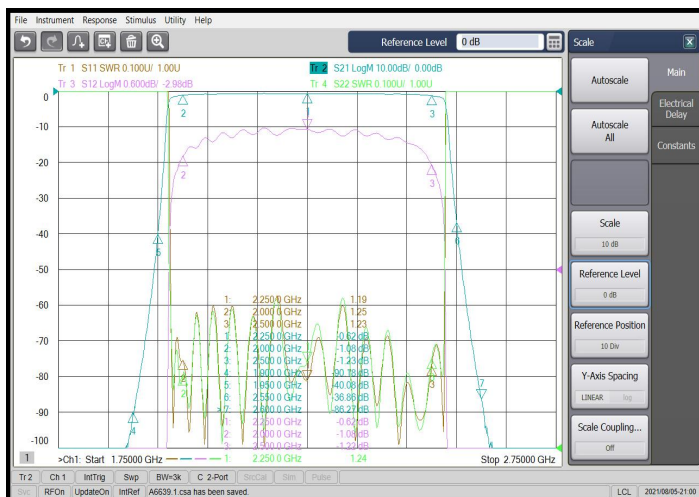

RF Characteristics	
Center Frequency[Fo]	2250MHz
Passband Bandwidth	500MHz(2000~2500MHz)
Passband Insertion Loss	1.5dB max.
Passband Ripple	0.85dB max.
Passband VSWR	1.6 max.
Stopband Attenuation	80dB min@DC~1900MHz 30dB min@1900~1950MHz 30dB min@2550~2600MHz 80dB min@2600~4000MHz
Impedance	50 Ohms
Power	2W
RF Connector	SMA female
Surface Finish	Black Paint
Operating Temperature	-30℃ ~ +70℃
Net Wight	100g

Outline Drawing(mm)

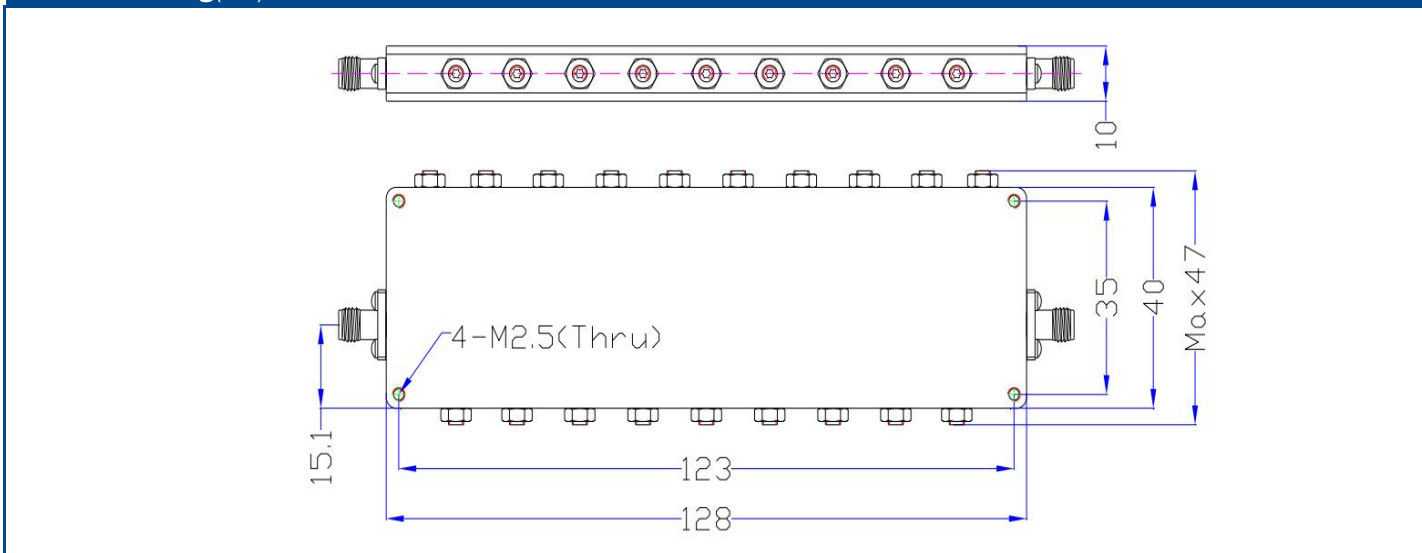

Outline Tolerances ±0.5mm (0.02inch)