




Product Features

- 2900 MHz Bandpass Filter
- High Rejection
- Low Insertion Loss
- SMA Connector
- Other center frequencies and bandwidths are available. Please consult the factory.


RF Characteristics

Center Frequency[Fo]	2900MHz
Operating Frequency	2000~3800MHz
Passband Insertion Loss	1.0dB max.
Passband Ripple	0.6dB max.
Passband VSWR	1.5 max.
Stopband Attenuation	60dB min@DC~1700MHz 55dB min@4100~5000MHz
Impedance	50 Ohms
Power Handling	2W
RF Connector	SMA female
Surface Finish	Black Paint
Operating Temperature	-30°C ~ +70°C
Net Wight	68g

Performance Chart

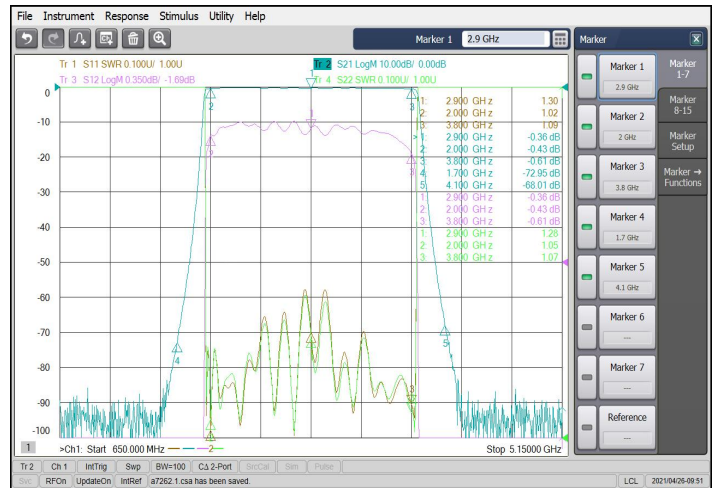

Outline Drawing(mm)

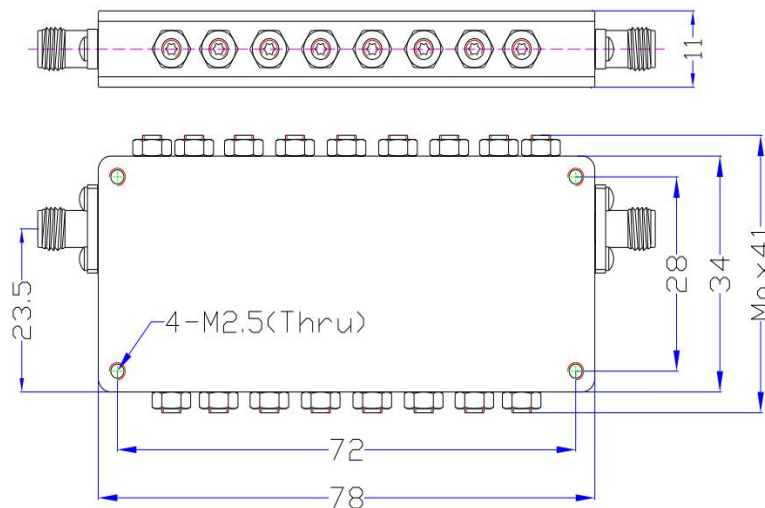

Outline Tolerances ±0.5mm (0.02inch)