




**Product Features**

- High Rejection
- Low Insertion Loss
- SMA Connector
- Other center frequencies and bandwidths are available. Please consult the factory.


**RF Characteristics**

Passband Frequency	2000~10000MHz
Passband Insertion Loss	1.5dB max.
Passband Ripple	1.5dB max.
Passband VSWR	1.6 max.
Stopband Attenuation	60dB min@DC~1400MHz 50dB min@10900~11300MHz 55dB min@11300~15400MHz 30dB min@15400~16900MHz 55dB min@16900~19500MHz
Impedance	50 Ohms
Power	5W
RF Connector	SMA female
Surface Finish	Black Paint
Operating Temperature	-30°C ~ +70°C

**Performance Chart**

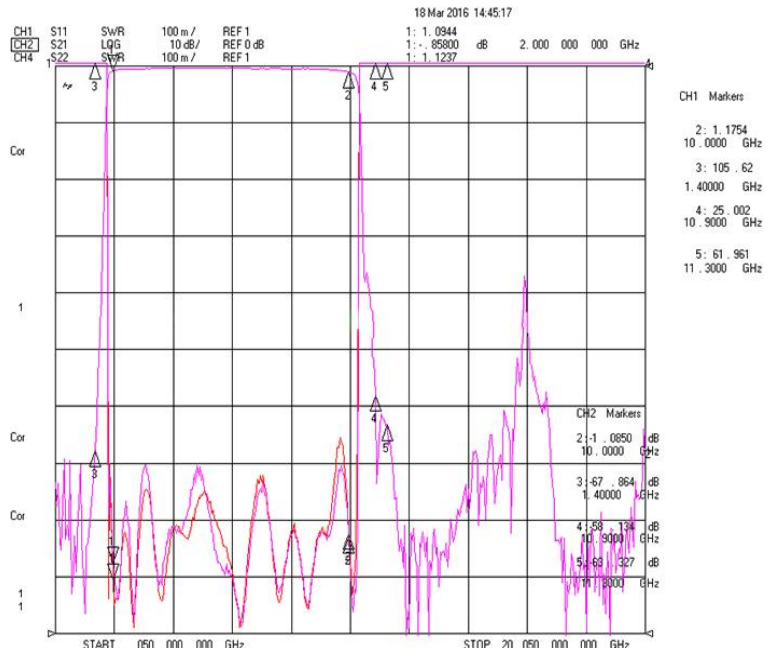

**Outline Drawing(mm)**

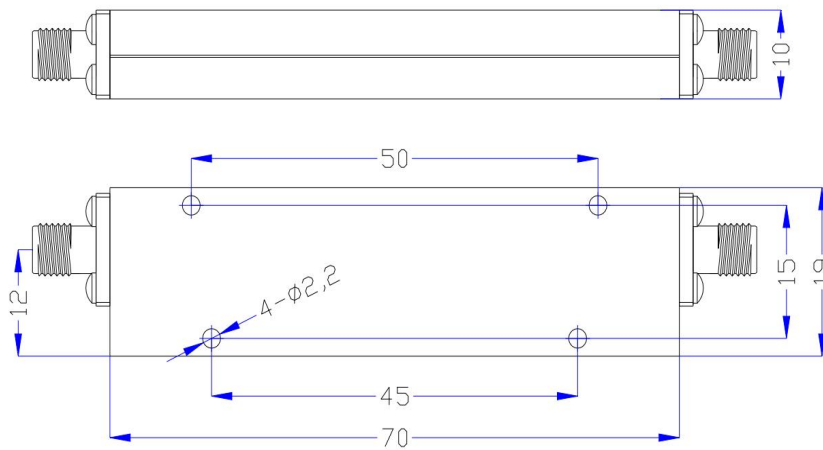

Outline Tolerances ±0.5mm (0.02inch)