




Product Features

- 2250 MHz Bandpass Filter
- High Rejection
- Low Insertion Loss
- SMA Connector
- Other center frequencies and bandwidths are available. Please consult the factory.


RF Characteristics

Center Frequency[Fo]	2250MHz
Operating Frequency	2200~2300MHz
Passband Insertion Loss	1.6dB max.
Passband Ripple	0.65dB max.
Passband Return Loss	20dB min.
Stopband Attenuation	50dB min@DC~2150MHz 50dB min@2350~6500MHz
Impedance	50 Ohms
Power Handling	20W
RF Connector	SMA female
Surface Finish	Black Paint
Operating Temperature	-30℃ ~ +70℃
Net Wight	224g

Performance Chart

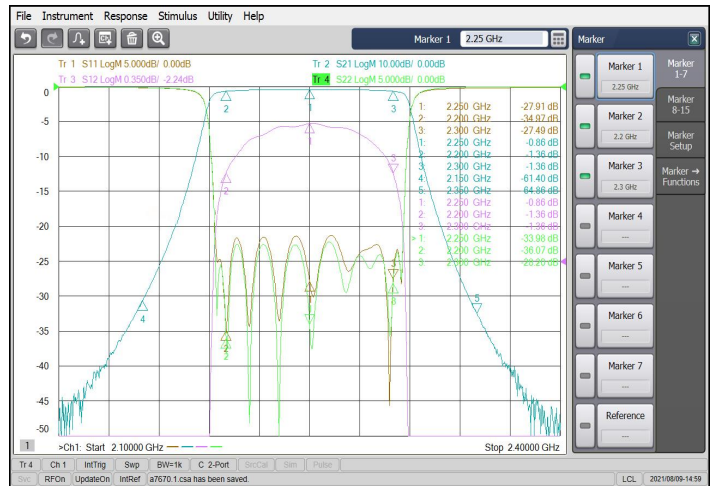

Outline Drawing(mm)

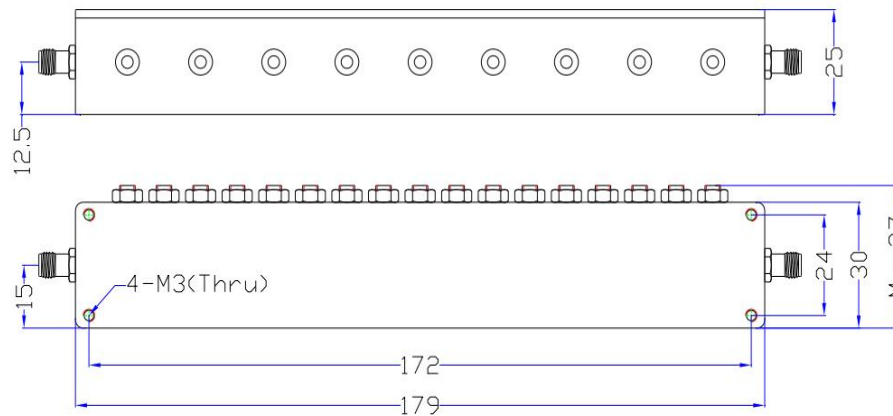

Outline Tolerances ±0.5mm (0.02inch)