




Product Features

- 2495 MHz Bandpass Filter
- High Rejection
- Low Insertion Loss
- SMA Connector
- Other center frequencies and bandwidths are available. Please consult the factory.


RF Characteristics

Center Frequency[Fo]	2495MHz
Operating Frequency	2300~2690MHz
Passband Insertion Loss	0.7dB max.
Passband Ripple	0.4dB max.
Passband Return Loss	20dB min.
Stopband Attenuation	45dB min@DC~2150MHz 55dB min@2840~6800MHz
Impedance	50 Ohms
Power Handling	20W
RF Connector	SMA female
Surface Finish	Black Paint
Operating Temperature	-30°C ~ +70°C
Net Wight	270g

Performance Chart

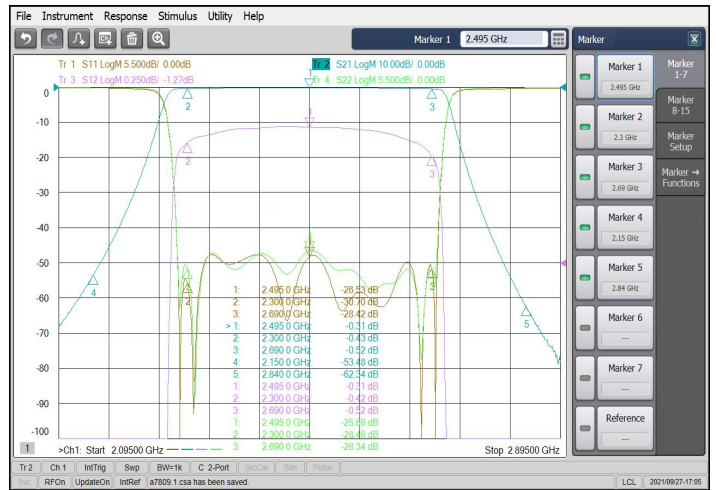

Outline Drawing(mm)

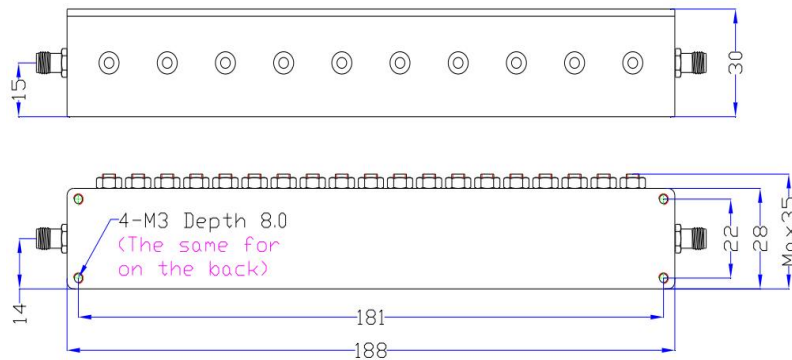

Outline Tolerances $\pm 0.5\text{mm}$ (0.02inch)