




Product Features

- High Rejection
- Low Insertion Loss
- SMA Connector
- Other center frequencies and bandwidths are available. Please consult the factory.


Performance Chart

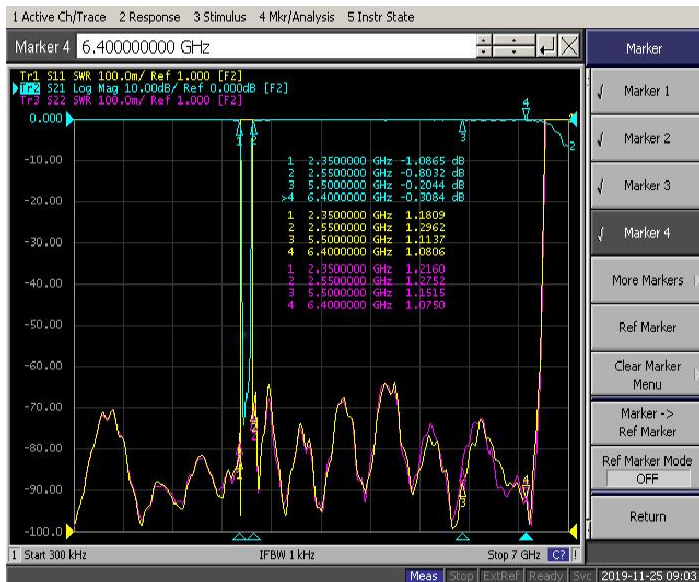

RF Characteristics

Operating Frequency	2400~2500MHz
Passband Insertion Loss	1.5dB max.
Passband VSWR	1.5 max.
Stopband Attenuation	50dB min@DC~2350MHz 50dB min@2550~5500MHz
Impedance	50 Ohms
Power Handling	30W
RF Connector	SMA female
Surface Finish	Black Paint
Operating Temperature	-30°C ~ +70°C
Net Wight	340g

Outline Drawing(mm)

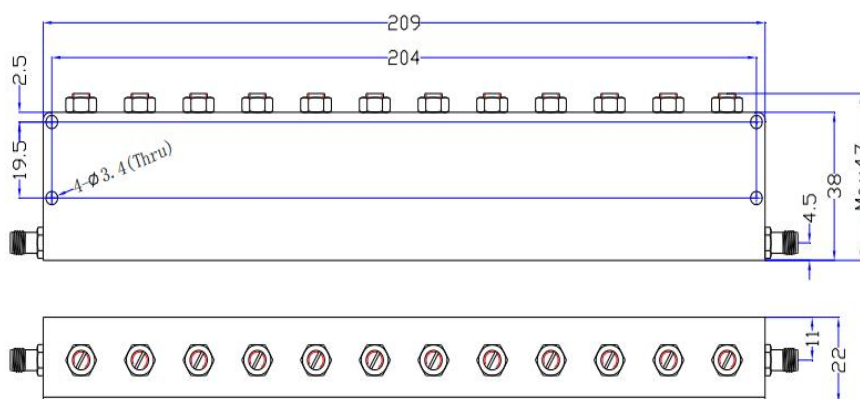

Outline Tolerances $\pm 0.5\text{mm}$ (0.02inch)