




Product Features


- 2600 MHz Bandpass Filter
- High Rejection
- Low Insertion Loss
- SMA Connector
- Other center frequencies and bandwidths are available. Please consult the factory.

Performance Chart

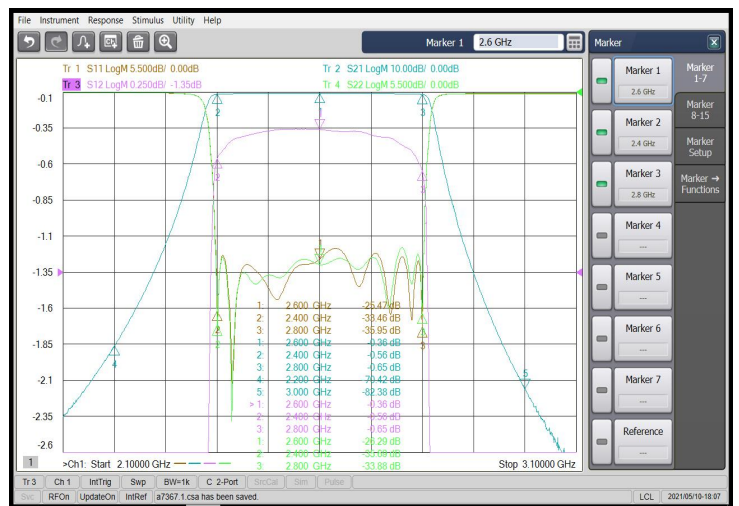

RF Characteristics	
Center Frequency[Fo]	2600MHz
Passband Frequency	2400~2800MHz
Passband Insertion Loss	0.9dB max.
Passband Ripple	0.5dB max.
Passband Return Loss	20dB min.
Stopband Attenuation	60dB min@DC~2200MHz 70dB min@3000~6500MHz
Impedance	50 Ohms
Power	50W
RF Connector	SMA female
Surface Finish	Black Paint
Operating Temperature	-30°C ~ +70°C
Net Weight	273g

Outline Drawing(mm)

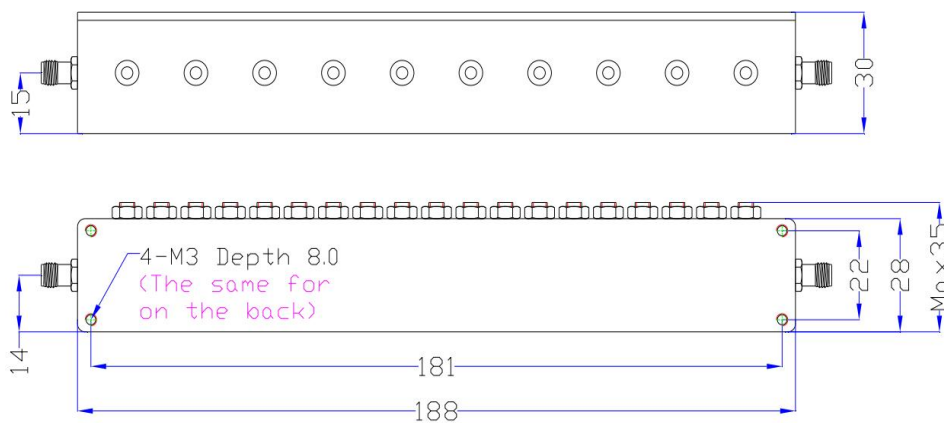

Outline Tolerances ±0.5mm (0.02inch)