




Product Features

- 2600 MHz Bandpass Filter
- High Rejection
- Low Insertion Loss
- SMA Connector
- Other center frequencies and bandwidths are available. Please consult the factory.


RF Characteristics

Center Frequency[Fo]	2600MHz
Passband Frequency	2500~2700MHz
Passband Insertion Loss	1.2dB max.
Passband Ripple	0.6dB max.
Passband Return Loss	20dB min.
Stopband Attenuation	30dB min@DC~2450MHz 30dB min@2750~6500MHz
Impedance	50 Ohms
Power	100W
RF Connector	SMA female
Surface Finish	Black Paint
Operating Temperature	-30°C ~ +70°C
Net Wight	213g

Performance Chart

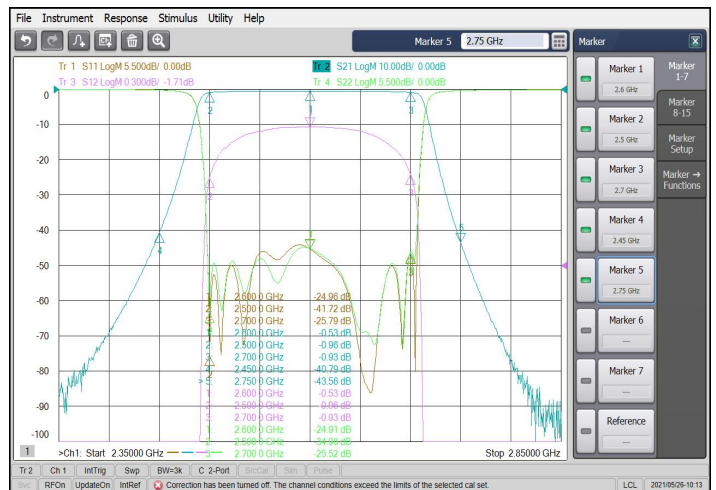

Outline Drawing(mm)

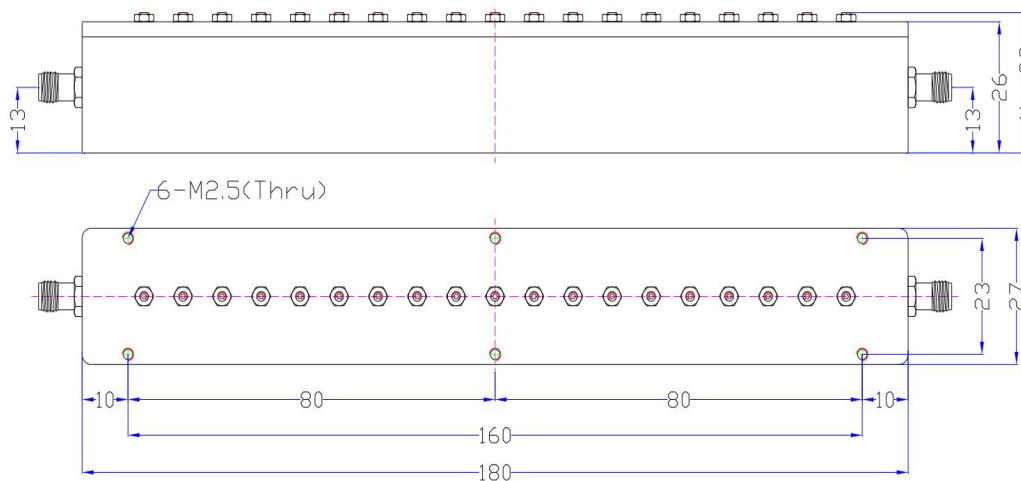

Outline Tolerances ±0.5mm (0.02inch)