




**Product Features**

- 2750 MHz Bandpass Filter
- High Rejection
- Low Insertion Loss
- SMA Connector
- Other center frequencies and bandwidths are available. Please consult the factory.


**Performance Chart**

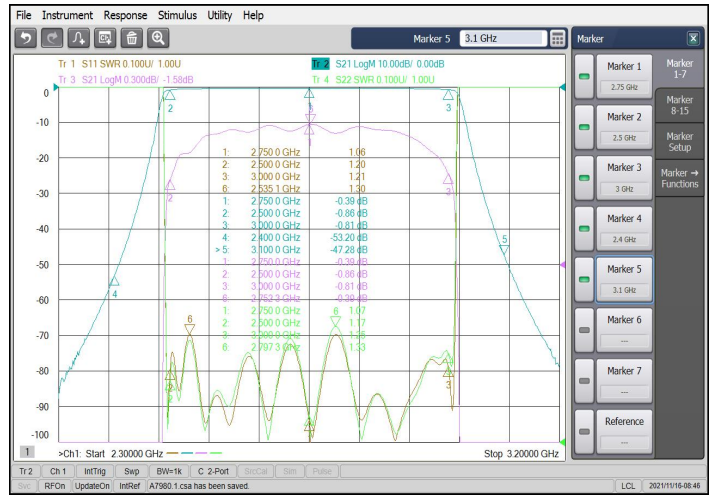

**RF Characteristics**

Center Frequency[Fo]	2750MHz
Passband Bandwidth	500MHz(2500~3000MHz)
Passband Insertion Loss	1.3dB max.
Passband Ripple	0.8dB max.
Passband VSWR	1.5 max.
Stopband Attenuation	40dB min@DC~2400MHz
	35dB min@3100~5000MHz
Impedance	50 Ohms
Power	2W
RF Connector	SMA female
Surface Finish	Black Paint
Operating Temperature	-30°C ~ +70°C
Net Wight	60g

**Outline Drawing(mm)**

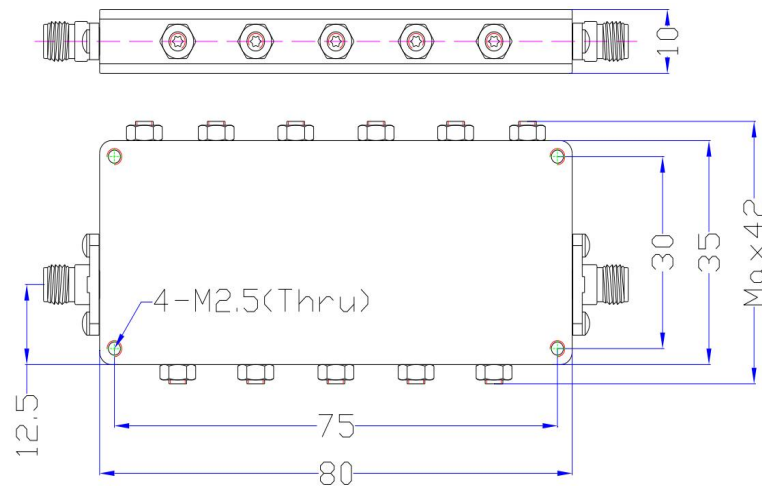

Outline Tolerances ±0.5mm (0.02inch)