




### Product Features

- 3150 MHz Bandpass Filter
- High Rejection
- Low Insertion Loss
- SMA Connector
- Other center frequencies and bandwidths are available. Please consult the factory.


### RF Characteristics

Center Frequency[Fo]	3150MHz
Passband Frequency	2800~3500MHz
Passband Insertion Loss	0.8dB max.
Passband Ripple	0.35dB max.
Passband VSWR	1.22 max.
Stopband Attenuation	65dB min@DC~2600MHz 80dB min@3700~10000MHz
Impedance	50 Ohms
Power	5W
RF Connector	SMA female
Surface Finish	Black Paint
Operating Temperature	-30°C ~ +70°C
Net Wight	285g

### Performance Chart

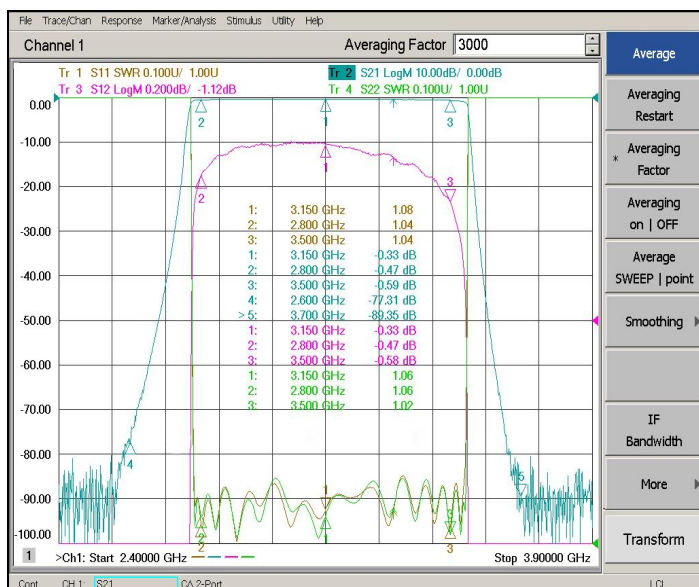

### Outline Drawing(mm)

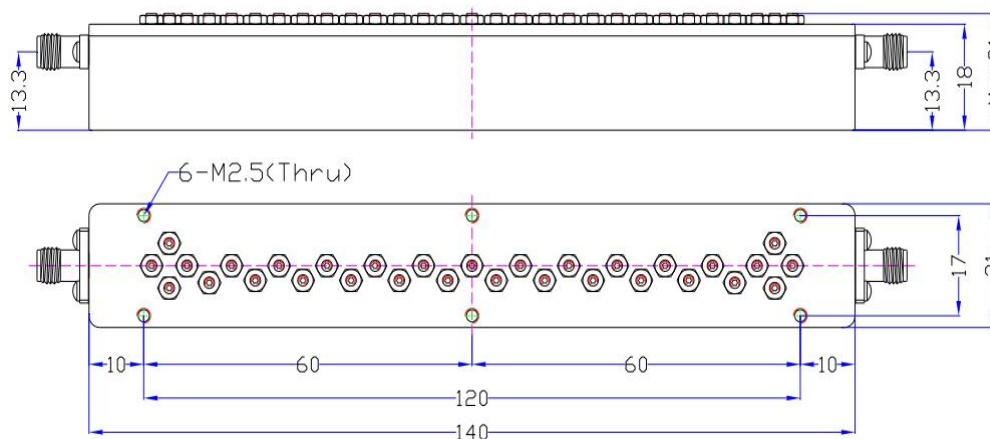

Outline Tolerances ±0.5mm (0.02inch)