




Product Features


- 3200 MHz Bandpass Filter
- High Rejection
- Low Insertion Loss
- SMA Connector
- Other center frequencies and bandwidths are available. Please consult the factory.

Performance Chart

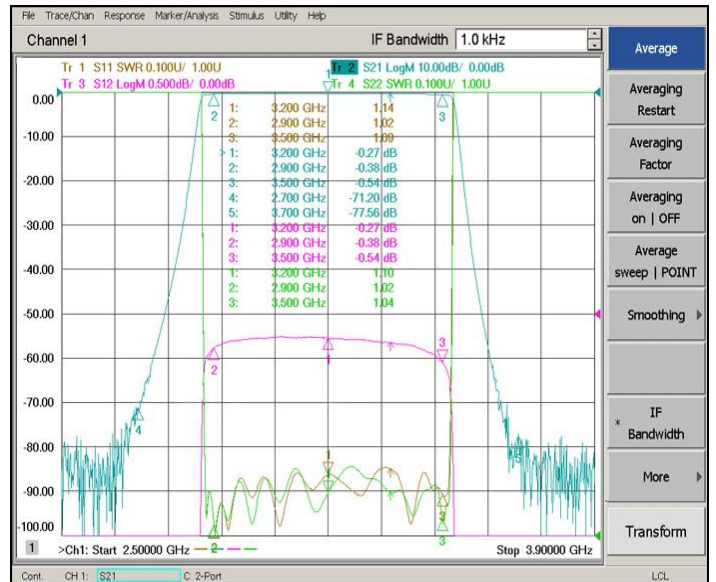

RF Characteristics	
Center Frequency[Fo]	3200MHz
Passband Frequency	2900~3500MHz
Passband Insertion Loss	2.0dB max.
Passband VSWR	1.3 max.
Stopband Attenuation	60dB min@DC~2700MHz 60dB min@3700~7000MHz
Impedance	50 Ohms
Power	5W
RF Connector	SMA female
Surface Finish	Black Paint
Operating Temperature	-20°C ~ +60°C
Net Weight	250g

Outline Drawing(mm)

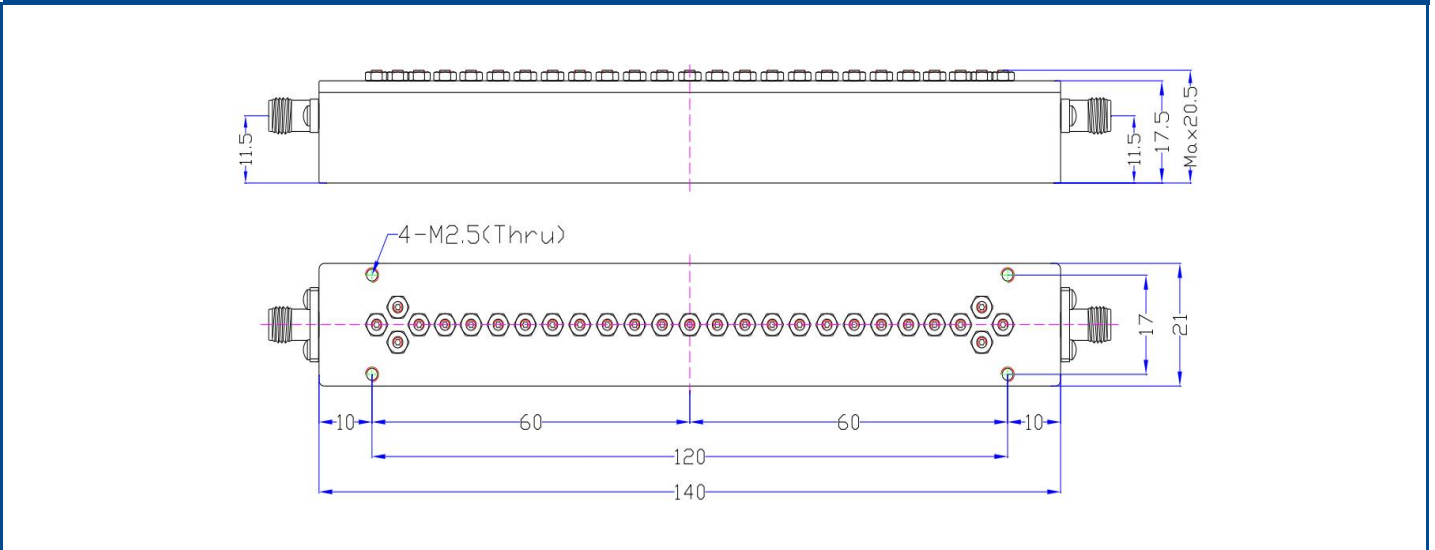

Outline Tolerances ±0.5mm (0.02inch)