


Product Features


- 3800 MHz Bandpass Filter
- High Rejection
- Low Insertion Loss
- SMA Connector
- Other center frequencies and bandwidths are available. Please consult the factory.

Performance Chart

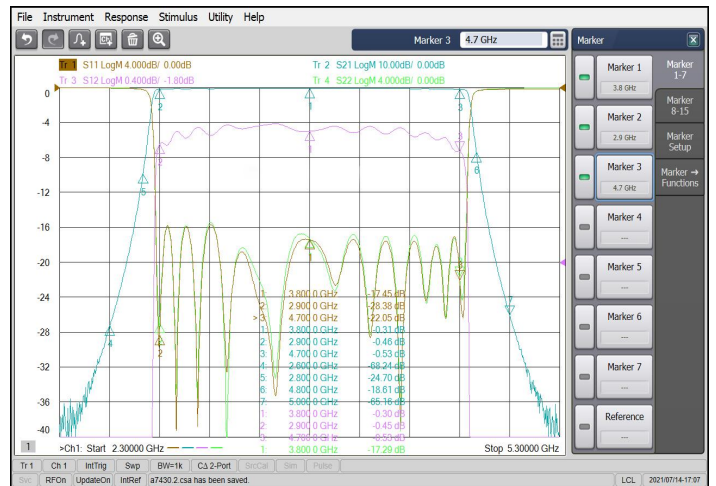

RF Characteristics	
Center Frequency[Fo]	3800MHz
Passband Frequency	2900~4700MHz
Passband Insertion Loss	1.0dB max.
Passband Ripple	0.6dB max.
Passband Return Loss	14dB min.
Stopband Attenuation	50dB min@DC~2600MHz 10dB min@2800MHz 10dB min@4800MHz 50dB min@5000~7500MHz
Impedance	50 Ohms
Power	2W
RF Connector	SMA female
Surface Finish	Black Paint
Operating Temperature	-30℃ ~ +70℃
Net Wight	85g

Outline Drawing(mm)

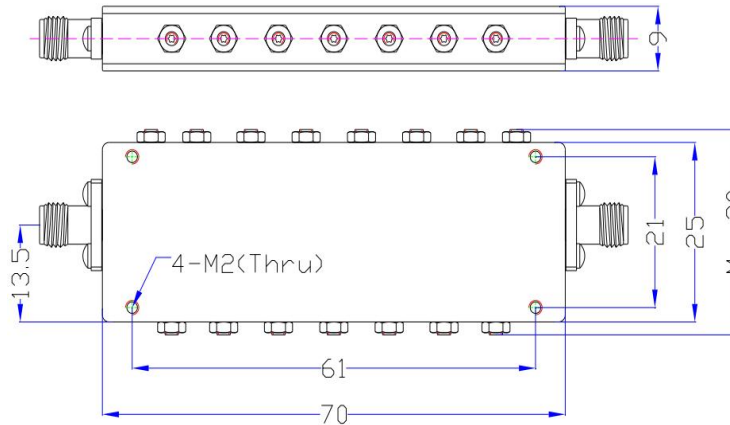

Outline Tolerances ±0.5mm (0.02inch)