




Product Features

- 4150 MHz Bandpass Filter
- High Rejection
- Low Insertion Loss
- SMA Connector
- Other center frequencies and bandwidths are available. Please consult the factory.


RF Characteristics

Center Frequency[Fo]	4150MHz
Passband Frequency	3400~4900MHz
Passband Insertion Loss	1.0dB max.
Passband Ripple	0.7dB max.
Passband VSWR	1.22 max.
Stopband Attenuation	35dB min@DC~3260MHz 35dB min@5000~13000MHz
Impedance	50 Ohms
Power Handling	5W
RF Connector	SMA female
Surface Finish	Black Paint
Operating Temperature	-30°C ~ +70°C
Net Wight	243g

Performance Chart

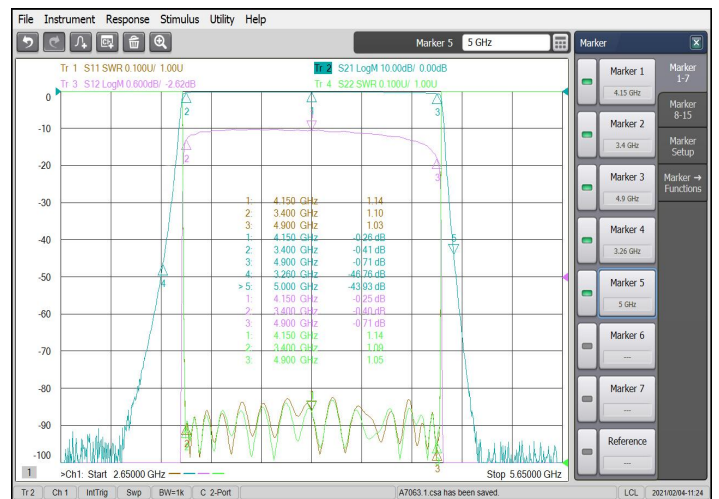

Outline Drawing(mm)

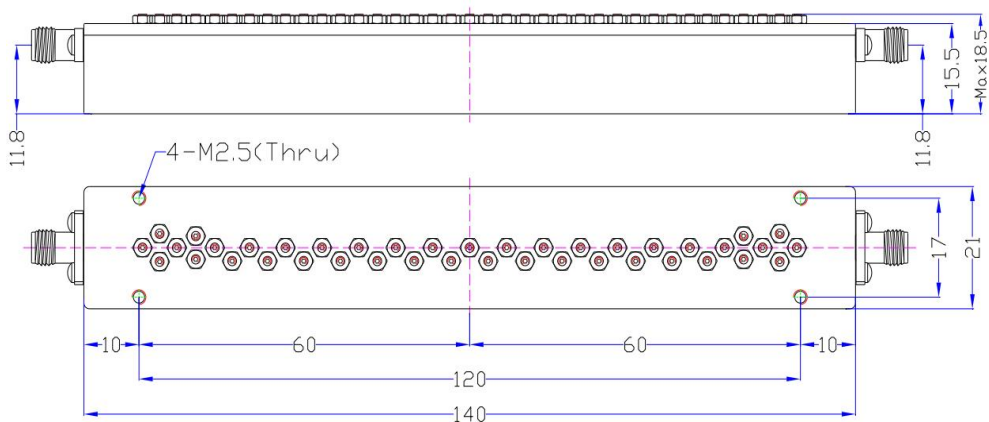

Outline Tolerances $\pm 0.5\text{mm}$ (0.02inch)