




### Product Features


- 4000 MHz Bandpass Filter
- High Rejection
- Low Insertion Loss
- SMA Connector
- Other center frequencies and bandwidths are available. Please consult the factory.

### Performance Chart

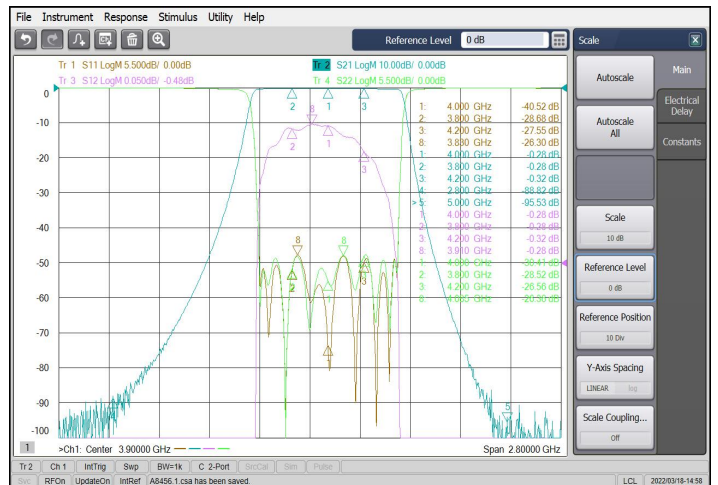

RF Characteristics	
Center Frequency[Fo]	4000MHz
Passband Frequency	3800~4200MHz
Passband Insertion Loss	0.5dB max.
Passband Ripple	0.25dB max.
Passband Return Loss	20dB min.
Stopband Attenuation	80dB min@DC~2800MHz 80dB min@5000~10000MHz 55dB min@10000~13000MHz
Impedance	50 Ohms
Power Handling	20W
RF Connector	SMA female
Surface Finish	Black Paint
Operating Temperature	-30°C ~ +70°C
Net Weight	140g

### Outline Drawing(mm)

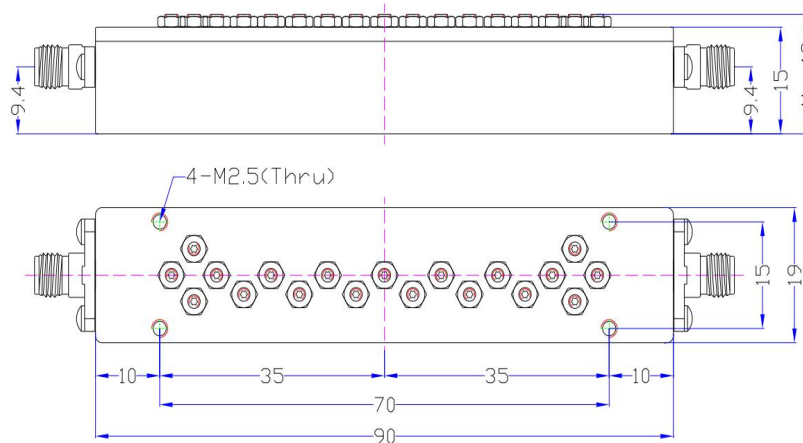

Outline Tolerances ±0.5mm (0.02inch)