

### **Datasheet**


Model Number: TMT4020M

# DC~40GHz, 20W, 2.92mm Male Coaxial Termination

## **Specifications**

Frequency Range	DC-40GHz
Input Avg Power	20W @25deg. C
Peak Power	200W (5µsec pulse width, 5% duty cycle)
VSWR	1.26 max.
Impedance	50 Ohms
Connector	2.92mm Male
Connector Body	Passivated stainless brass
Center Contact	Gold plated beryllium copper(≥1.27um)
Operating Temperature	-55~+100deg. C
Storage Temperature	-55~+125deg. C
Heat Sink	Black anodized aluminum
RoHS Status	RoHS Compliant

#### Dimensions[mm]:

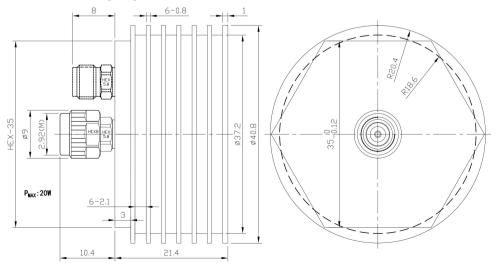



## **Typical Test Curve**

