

#### **Datasheet**


Model Number: TMT4020F

# DC~40GHz, 20W, 2.92mm Female Coaxial Termination

### **Specifications**

DC-40GHz
20W @25deg. C
200W (5µsec pulse width, 5% duty cycle)
1.26 max.
50 Ohms
2.92mm Female
Passivated stainless brass
Gold plated beryllium copper(≥1.27um)
-55~+100deg. C
-55~+125deg. C
Black anodized aluminum
RoHS Compliant

#### Dimensions[mm]:

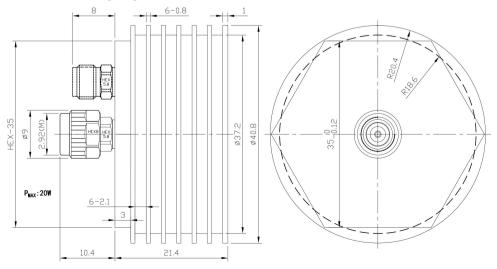



## **Typical Test Curve**

