




Datasheet Model Number : TMT4045F

## DC~40GHz, 45W, 2.92mm Female Coaxial Termination

## **Specifications**

Frequency Range	DC-40GHz
Input Avg Power	45W @25deg. C
Peak Power	200W (5µsec pulse width, 10% duty cycle)
VSWR	1.38 max.
Impedance	50 Ohms
Connector	2.92mm Female
Connector Body	Passivated stainless brass
Center Contact	Gold plated beryllium copper(≥1.27um)
Operating Temperature	-55~+100deg. C
Storage Temperature	-55~+125deg. C
Heat Sink	Black anodized aluminum
RoHS Status	RoHS Compliant

## Dimensions[mm]:

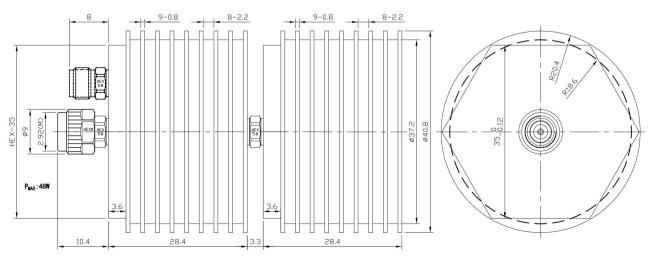


All product specifications are subject to change without notice

A Professional RF & Microwave Components Supplier



## **Typical Test Curve**

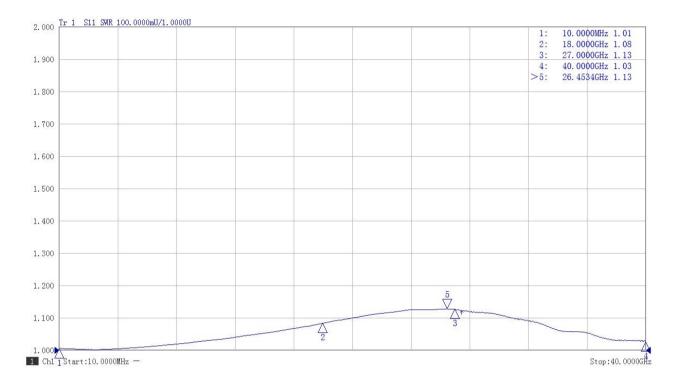

Titan Microwave Inc.

A Professional RF & Microwave Components Supplier

www.titan-microwave.com

All product specifications are subject to change without notice