




Datasheet Model Number : TMT5010F DC~50GHz, 10W, 2.4mm Female Coaxial Termination

## **Specifications**


Frequency Range	DC-50GHz
Input Avg Power	10W @25deg. C
Peak Power	100W (5µsec pulse width, 4% duty cycle)
VSWR	1.3 max.
Impedance	50 Ohms
Connector	2.4mm Female
Connector Body	Passivated stainless brass
Center Contact	Gold plated beryllium copper(≥1.27um)
Operating Temperature	-55~+100deg. C
Storage Temperature	-55~+125deg. C
Heat Sink	Black anodized aluminum
RoHS Status	RoHS Compliant

## Dimensions[mm]:

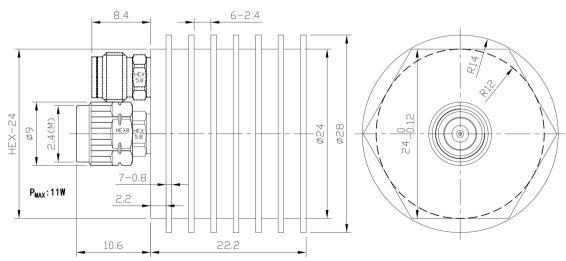



## **Typical Test Curve**

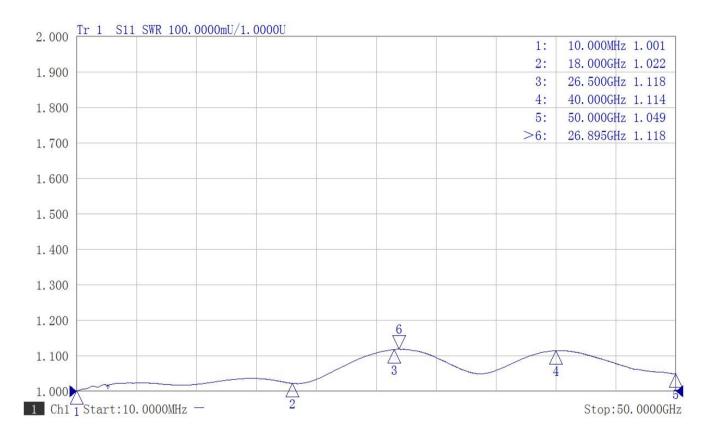

A Professional RF & Microwave Components Supplier

All product specifications are subject to change without notice