

Datasheet


Model Number: TMT675F

DC~67GHz, 5W, 1.85mm Female Coaxial Termination

Specifications

DC-67GHz
5W @25deg. C
50W (5µsec pulse width, 4% duty cycle)
1.45 max.
50 Ohms
1.85mm Female
Passivated stainless steel
Gold plated beryllium copper(≥1.27um)
-55~+100deg. C
-55~+125deg. C
Black anodized aluminum
RoHS Compliant

Dimensions[mm]:

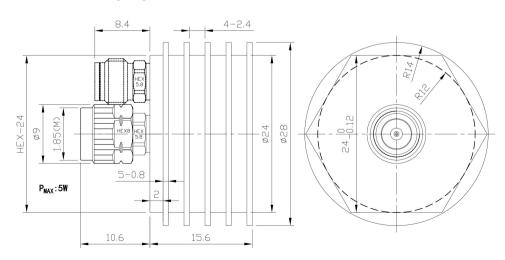



Typical Test Curve

