



## Datasheet


Model Number : TMT402SAM

# DC~40GHz, 2W, SSMA Male Coaxial Termination

## Specifications

Frequency Range	DC-40GHz
Input Avg Power	2W @25deg. C
Peak Power	250W (5μsec pulse width, 0.4% duty cycle)
VSWR	1.35 max.
Impedance	50 Ohms
Connector	SSMA Male
Connector Body	Passivated stainless steel
Center Contact	Gold plated brass
Operating Temperature	-55~+100deg. C
Storage Temperature	-55~+125deg. C
Heat Sink	N/A
RoHS Status	RoHS Compliant

Dimensions[mm]:

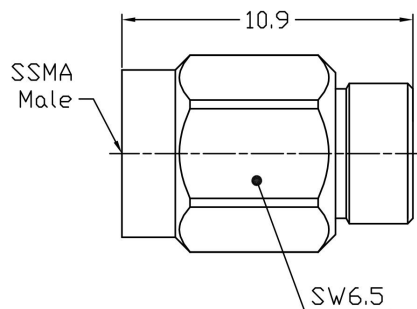

## Typical Test Curve

