



Datasheet


Model Number : TMT402SPF

DC~40GHz, 2W, SMP Female Coaxial Termination

Specifications

| | |
|-----------------------|--|
| Frequency Range | DC-40GHz |
| Input Avg Power | 2W @25deg. C |
| Peak Power | 250W (5μsec pulse width, 0.4% duty cycle) |
| VSWR | 1.35 max. |
| Impedance | 50 Ohms |
| Connector | SMP Female |
| Connector Body | Gold plated beryllium copper |
| Center Contact | Gold plated beryllium copper |
| Operating Temperature | -55~+100deg. C |
| Storage Temperature | -55~+125deg. C |
| Heat Sink | N/A |
| RoHS Status | RoHS Compliant |

Dimensions[mm]:

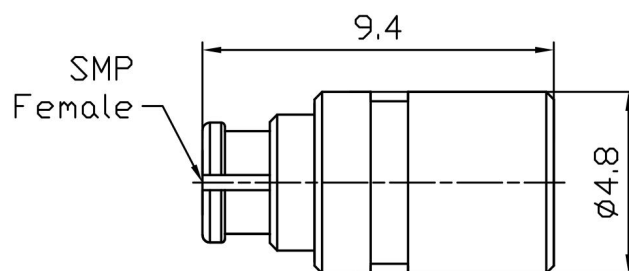

Typical Test Curve

