



## Datasheet


Model Number : TMT402MPF

# DC~40GHz, 2W, SSMP Female Coaxial Termination

## Specifications

|                       |  |
|-----------------------|--|
| Frequency Range       | DC-40GHz                                     |
| Input Avg Power       | 2W @25deg. C                                 |
| Peak Power            | 250W<br>(5μsec pulse width, 0.4% duty cycle) |
| VSWR                  | 1.5 max.                                     |
| Impedance             | 50 Ohms                                      |
| Connector             | SSMP Female                                  |
| Connector Body        | Gold plated beryllium copper                 |
| Center Contact        | Gold plated beryllium copper                 |
| Operating Temperature | -55~+100deg. C                               |
| Storage Temperature   | -55~+125deg. C                               |
| Heat Sink             | N/A  |
| RoHS Status           | RoHS Compliant                               |

Dimensions[mm]:

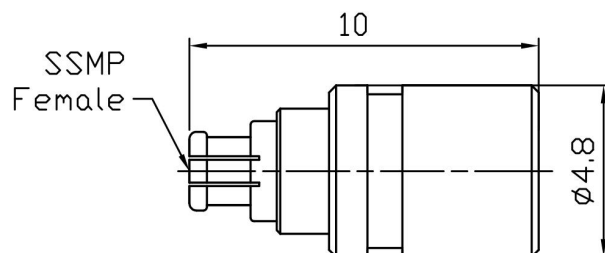

## Typical Test Curve

