



**SPECIFICATIONS**

Frequency Range:	1000~18000 MHz
Gain	45dB min.
Gain Flatness	±2.5dB max.
Noise Figure	2.8dB max.
VSWR	2.2 max.
Output Power(P-1dB)	15dBm min.
Impedance	50Ω
Supply Voltage	+12V
Supply Current	300mA
Operating Temp.	-40°C~+70°C
RF Connectors	SMA Female removable (0.38mm pin)

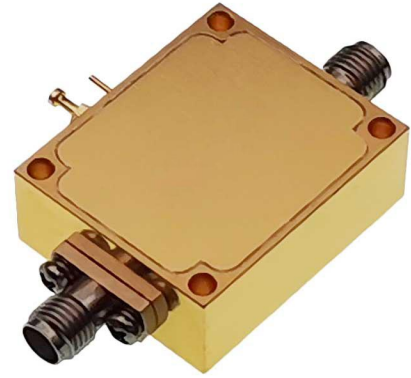

**50 Ohm Typical Characteristics**

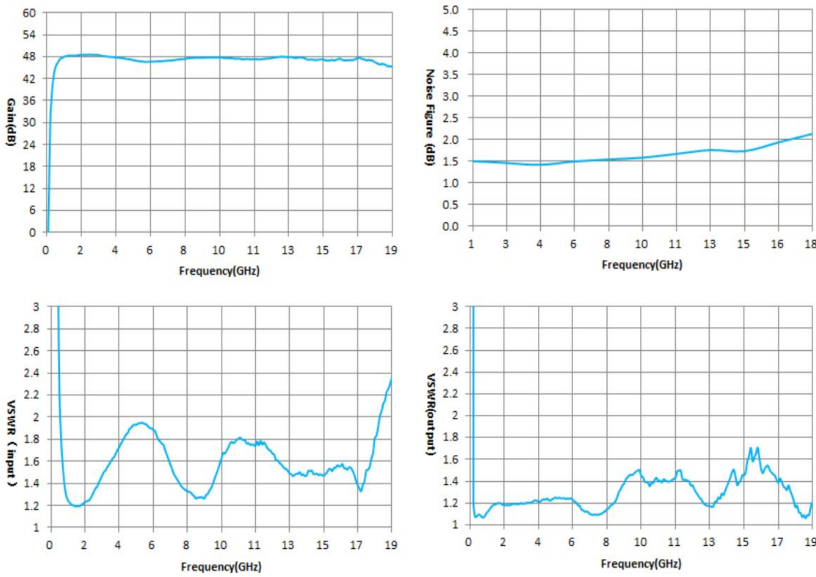

**Dimensions[mm]**

