


### SPECIFICATIONS

Frequency Range:	3000~6000 MHz
Gain	50dB min.
Gain Flatness	±5dB max.
Noise Figure	1.0dB max.
VSWR	2.2 max.
Output Power(P-1 dB)	10dBm min.
Impedance	50Ω
Supply Voltage	+12V
Supply Current	300mA
Operating Temp.	-40°C~+70°C
RF Connectors	SMA Female removable (0.38mm pin)



### Dimensions[mm]

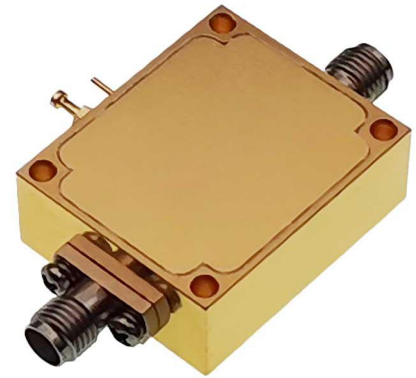