


**SPECIFICATIONS**

Frequency Range:	6000~18000 MHz
Gain	35dB typ.
Gain Flatness	±2dB typ.
Noise Figure	3.5dB typ.
VSWR	2 typ.
Input Power	-15dBm max.
Output Power(P-1 dB)	13dBm typ.
Impedance	50Ω
Supply Voltage	+12~15V
Supply Current	200mA
Operating Temp.	-20°C~+70°C
Storage Temp.	-55°C~+100°C



**Typical Performances**

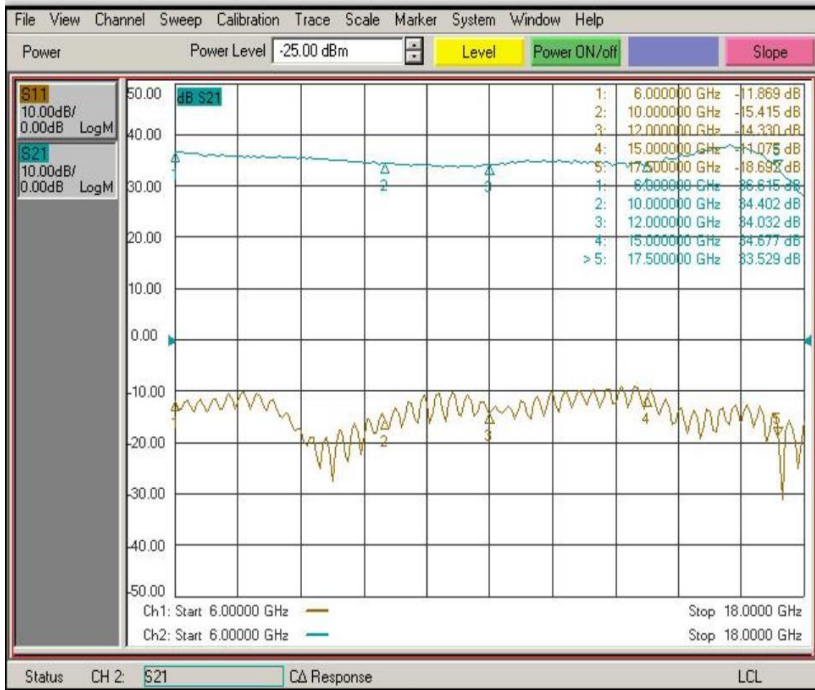

**Dimensions[mm]**

