

FEATURES

- Small Size
- High Accuracy
- High Stability
- Rugged Design

APPLICATIONS

- Wireless Communication
- Laboratory Test



Electrical Specifications

Frequency Range	DC~8GHz
Attenuation Range/Steps	0~69dB in 1dB steps
Attenuation Accuracy	±0.5dB (0~9dB)
	±1.0dB (10~19dB)
	±1.5dB (20~49dB)
	±2.0dB (50~70dB)
VSWR	1.5 max.
Insertion Loss	1.0 max.
Impedance	50 Ohms
Average Power	2W or 5W
Peak Power	200 Watts
	(5μs pulse width, 0.5% duty cycle)


Mechanical Specifications

Connector	SMA female to SMA female
Connector Material	Stainless Steel
Female Pin	Beryllium Copper, Gold Plated
Housing	Aluminum
Temperature Range	0°C ~ +54°C
Weight	480g
Size	163×Ø48mm
RoHS Status	RoHS Compliant

Ordering Information

XW	SA	16348	-	8	-	69	-	S
RF Connector								
S: SMA female to SMA female								
Max Attenuation Value(dB)								
Max Frequency(GHz)								
Attenuator Dimensions(mm)								
Step Attenuator								
Average Power ▷ options: 2W, 5W								

Outline Drawings[mm]

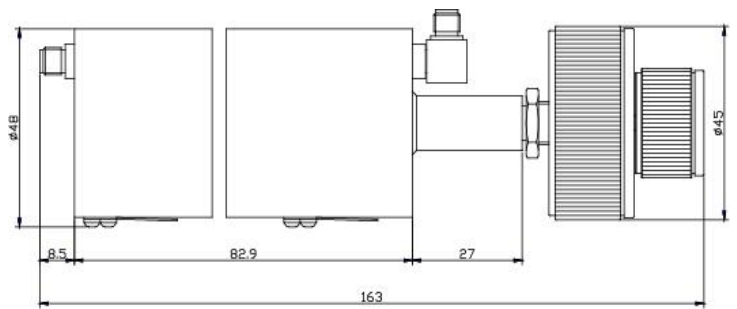

* XWSA16348-8-69-S becomes: **2WSA16348-8-69-S** when average power 2W is desired.
 * XWSA16348-8-69-S becomes: **5WSA16348-8-69-S** when average power 5W is desired.