

## FEATURES

- Small Size
- High Accuracy
- High Stability

## APPLICATIONS

- Laboratory Test and Measurement
- Wireless Communication



## Electrical Specifications


Frequency Range	DC~2GHz
Impedance	50Ω nominal
Attenuation Range	0~127dB in 1dB steps
Attenuation Steps(dB)	1, 2, 4, 8, 16, 32, 32, 32
Switching Time	6ms
VSWR	1.45 max
Accuracy	±0.6dB@Attn≤10dB ±1.2dB@16/20/32dB
Insertion Loss	3.5dB max
Average Power	2W
Operating Voltage	+5V
Operating Current	100mA/Cell, 50mA/Cell
Temperature Range	-55°C~+70°C
RoHS Status	RoHS Compliant

## Mechanical Specifications

RF Connector	SMA female
Connector Body	Gold Plated Brass
Female Pin	Gold Plated Beryllium Cooper
Housing	Aluminum, Nickel
Weight	135g

◇ Test Data is available at an additional cost ◇

## Dimensions [mm]

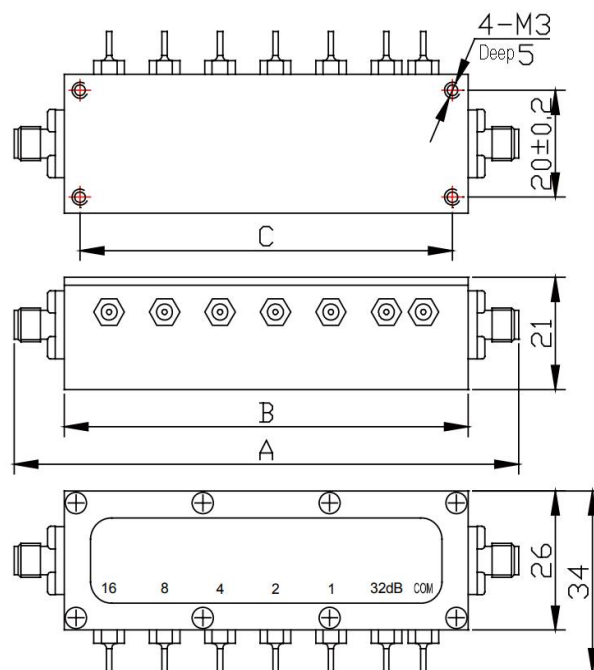

A	116.5
B	97.5
C	91.5

## FEATURES

- Small Size
- High Accuracy
- High Stability

## APPLICATIONS

- Laboratory Test and Measurement
- Wireless Communication




## Electrical Specifications

Frequency Range	DC~2GHz
Impedance	50Ω nominal
Attenuation Range	0~127dB in 1dB steps
Attenuation Steps(dB)	1, 2, 4, 8, 16, 32, 32, 32
Switching Time	6ms
VSWR	1.45 max
Accuracy	±0.6dB@Attn≤10dB ±1.2dB@16/20/32dB
Insertion Loss	3.5dB max
Average Power	2W
Control Voltage	+5V
Control Current	100mA/Cell, 50mA/Cell
Driver Voltage	2.7V~5V
Driver Current	15mA min/Cell
Temperature Range	-55°C~+70°C
RoHS Status	RoHS Compliant

## Mechanical Specifications


RF Connector	SMA female
Control Connector	14 PIN Ribbon Cable
Connector Body	Gold Plated Brass
Female Pin	Gold Plated Beryllium Cooper
Housing	Aluminum, Nickel
Weight	150g

## Dimensions [mm]

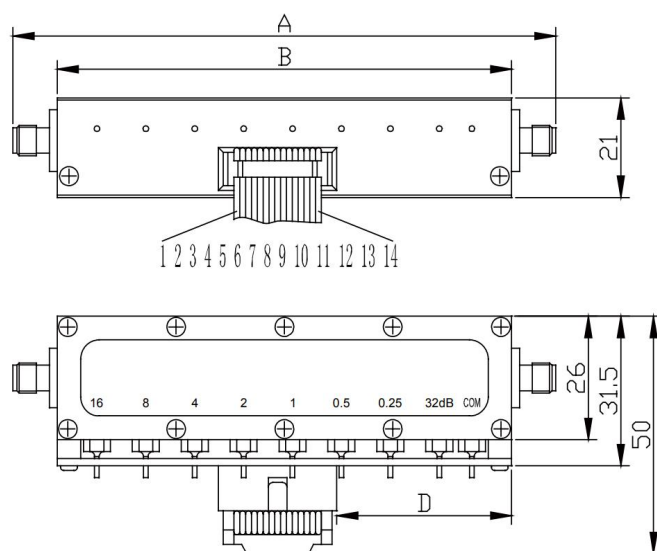

A	116.5
B	97.5
D	47.6

## Control Connector PIN Locations

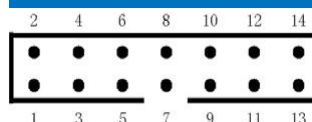

PIN No.	1	2	3	4	5	6	7	8	9	10	11	12	13	14
dB, 8 Cells	N	N	32	N	COM	V+	N	32	2	4	1	8	16	32

◇ N: Not Connected, COM: 0V, V+: Operating Voltage ◇

## FEATURES

- Small Size
- High Accuracy
- High Stability

## APPLICATIONS

- Laboratory Test and Measurement
- Wireless Communication




## Electrical Specifications

Frequency Range	DC~2GHz
Impedance	50Ω nominal
Attenuation Range	0~127dB in 1dB steps
Attenuation Steps(dB)	1, 2, 4, 8, 16, 32, 32, 32
Switching Time	6ms
VSWR	1.45 max
Accuracy	±0.6dB@Attn≤10dB ±1.2dB@16/20/32dB
Insertion Loss	3.5dB max
Average Power	2W
Voltage	AC~220V/5V
Temperature Range	-55°C~+70°C
RoHS Status	RoHS Compliant

## Mechanical Specifications

RF Connector	SMA female
Control Connector	RS-232
Connector Body	Gold Plated Brass
Female Pin	Gold Plated Beryllium Cooper
Housing	Aluminum, Anodic Oxidation
Weight	415g

## Dimensions[mm]

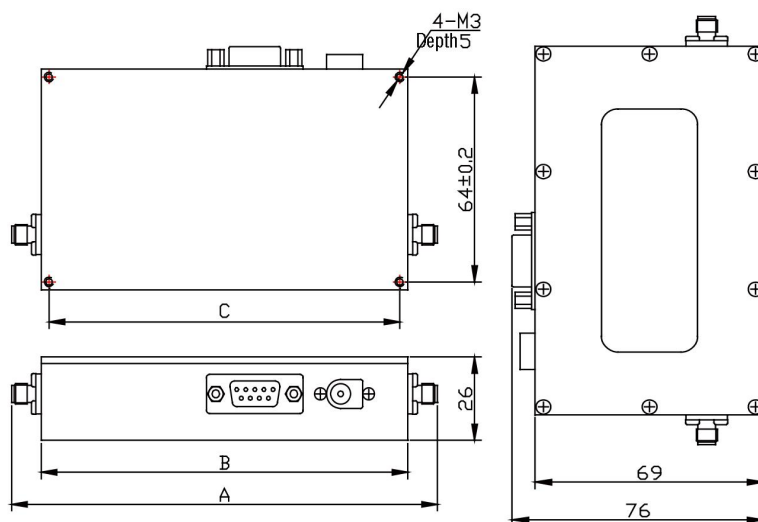

A	157.5
B	138.5
C	133.5

◇ Test Data is available at an additional cost ◇