


Product Features

- LO/RF 2.0 to 6.0GHz
- IF DC to 2.5 GHz
- 7.5 dB Typical Conversion Loss
- 47 dB Typical LO to RF Isolation
- Broadband RF and LO
- Small Size, Light Weight

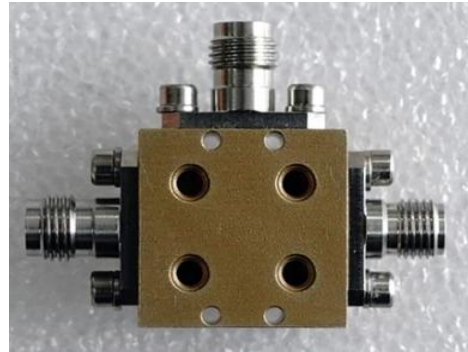

SPECIFICATIONS

Parameters	Min.	Typ.	Max.	Units
Frequency Range RF/LO	2	-	6	GHz
Frequency Range IF	DC	-	2.5	GHz
LO Drive Level	-	14	-	dBm
Conversion Loss	-	7.5	-	dB
Isolation LO/RF	-	47	-	dB
Isolation LO/IF	-	40	-	dB
Isolation RF/IF	-	19	-	dB
Input P1dB	-	11	-	dBm
Input IP3	-	18	-	dBm
RF Port Return Loss	-	12	-	dB
LO Port Return Loss	-	7	-	dB
Operating Temperature	-40	-	+85	°C
Storage Temperature	-65	-	+125	°C
Connectors(RF/IF/LO)	SMA Female			
Housing Material	Aluminum Alloy			
Size(without connectors)	20mm×20mm×11mm			
Weight	17g			

Outline Drawing[mm]

