


## Product Features

- SPDT Absorptive Switch
- 26.5 GHz to 40.0 GHz
- 65 dB Typical Isolation
- Power Input +23 dBm Max
- Broadband, TTL Control
- Small Size, Light Weight

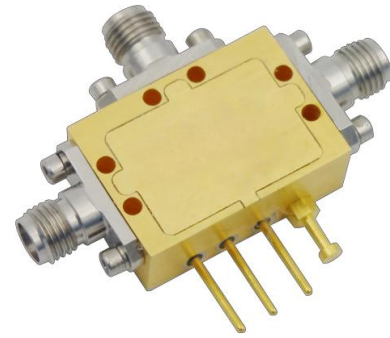

## SPECIFICATIONS

Parameters	Min.	Typ.	Max.	Units	
Frequency Range	26.5	-	40	GHz	
Impedance	-	50	-	Ohms	
Insertion Loss	5	-	7.5	dB	
Isolation	-	65	-	dB	
Return Loss	-	12	-	dB	
Switching Time	-	100	-	nS	
Input Power	-	-	23	dBm	
DC Bias Voltage	-	±5	-	V	
DC Bias Current	-	20	-	mA	
Operating Temperature	-40	-	+85	°C	
Storage Temperature	-65	-	+125	°C	
Control	TTL		<b>TRUTH TABLE</b>		
DC Bias/TTL Control Connector	Feedthrough Capacitor				
Input/Output Connector	2.92mm female		TTL	J1-J2	J1-J3
Housing Material	Aluminum Alloy		"0"	ON	OFF
Size (without connectors)	30mm × 25mm × 11mm		"1"	OFF	ON
Weight	28.3g				

## Outline Drawing [mm]

