

**TMDC-00800350-30N200 0.8-3.5 GHz, 30dB, 200W, N Female**

**FEATURES**

- ❖ Wide Band Operation 0.8-3.5 GHz
- ❖ Power Handle Capability up to 200W
- ❖ 30 dB Typical Coupling
- ❖ Low Insertion Loss


**APPLICATIONS**

- ❖ Frequency Measurements
- ❖ Signal Levelling, Signal Sampling
- ❖ Signal Injection
- ❖ Reflection Coefficient Measurements
- ❖ Measure incident and reflected power to determine VSWR

**SPECIFICATIONS**

Parameters	Min.	Typ.	Max.	Units
Frequency Range	0.8	-	3.5	GHz
Impedance	-	50	-	Ohms
Nominal Coupling	29	30	31	dB
Frequency Sensitivity	-	±0.7	±1.0	dB
Directivity	20	22	-	dB
Insertion Loss(Excluding Coupling)	-	-	0.3	dB
Insertion Loss(True)	-	0.15	0.3	dB
VSWR Primary	-	1.2	1.25	:1
VSWR Secondary	-	1.2	1.25	:1
Average Power	200			W
Peak Power	3(10% Duty Cycle, 1µs Pulse Width)			kW
Operating Temperature	-40°C~+85°C			
Storage Temperature	-50°C~+105°C			
Input/Output Connectors	N female			
Weight	330g max			
Surface Finishing	Gray Plated			
Material	Aluminum			

**Outline Drawing [mm[inch]]**

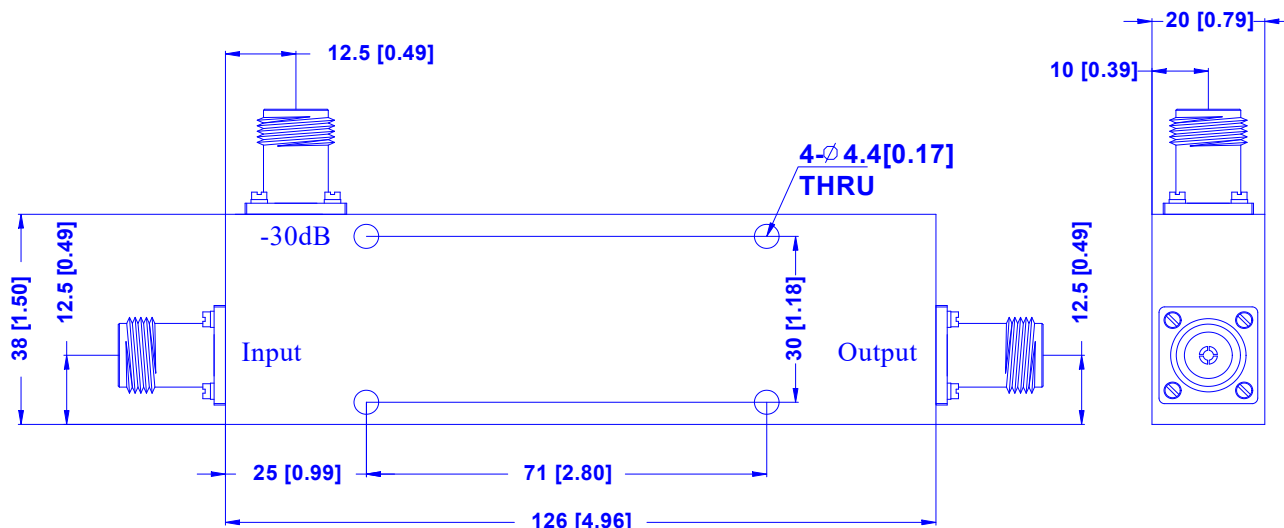

Tolerances ±0.5[0.02]