

**TMDC-01002650-10S20 1-26.5 GHz, 10dB, 20W, SMA Female**

**FEATURES**

- ❖ Wide Band Operation 1-26.5 GHz
- ❖ Power Handle Capability up to 20W
- ❖ 10 dB Typical Coupling
- ❖ Low Insertion Loss


**APPLICATIONS**

- ❖ Frequency Measurements
- ❖ Signal Levelling, Signal Sampling
- ❖ Signal Injection
- ❖ Reflection Coefficient Measurements
- ❖ Measure incident and reflected power to determine VSWR

**SPECIFICATIONS**

Parameters	Min.	Typ.	Max.	Units
Frequency Range	1	-	26.5	GHz
Impedance	-	50	-	Ohms
Nominal Coupling	8.5	10	11.5	dB
Frequency Sensitivity	-	±0.7	±1.0	dB
Directivity	12	15	-	dB
Insertion Loss(Excluding Coupling)	-	-	2.0	dB
Insertion Loss(True)	-	2.0	2.5	dB
VSWR Primary	-	1.45	1.6	:1
VSWR Secondary	-	1.4	1.5	:1
Average Power	20			W
Peak Power	300(10% Duty Cycle, 1µs Pulse Width)			W
Operating Temperature	-40°C~+85°C			
Storage Temperature	-50°C~+105°C			
Input/Output Connectors	SMA female			
Weight	50g max			
Surface Finishing	Gray Paint			
Material	Aluminum			

**Outline Drawing [mm[inch]]**

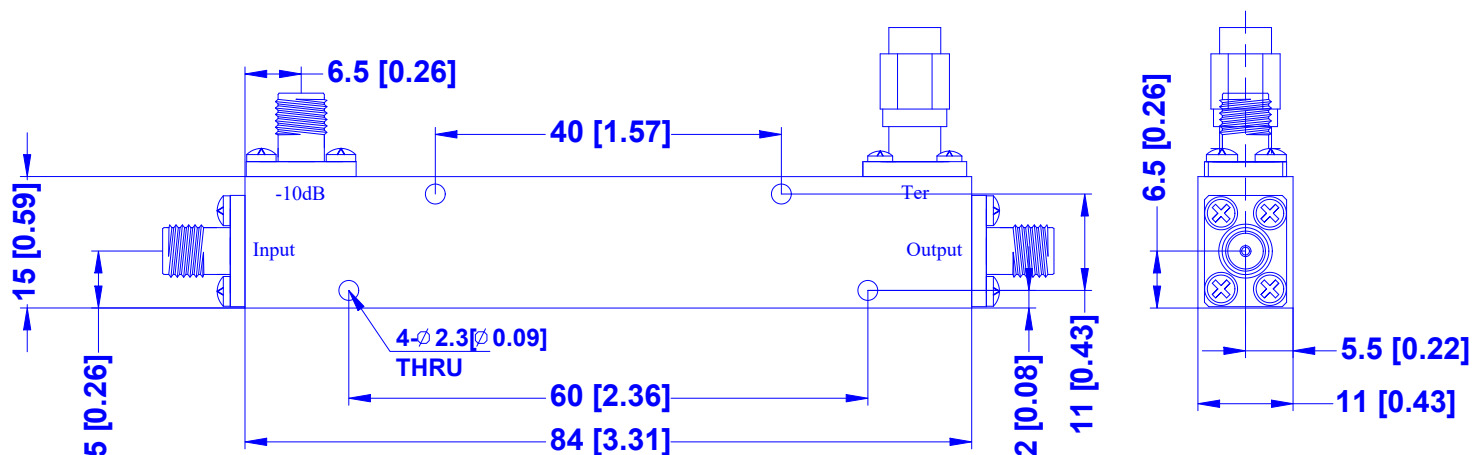

Tolerances ±0.5[0.02]