

TMDC-02005200-20220 2-52 GHz, 20dB, 20W, 2.4mm Female

FEATURES

- ❖ Wide Band Operation 2-52GHz
- ❖ Power Handle Capability up to 20W
- ❖ 20 dB Typical Coupling
- ❖ Low Insertion Loss


APPLICATIONS

- ❖ Frequency Measurements
- ❖ Signal Levelling, Signal Sampling
- ❖ Signal Injection
- ❖ Reflection Coefficient Measurements
- ❖ Measure incident and reflected power to determine VSWR

SPECIFICATIONS

Parameters	Min.	Typ.	Max.	Units
Frequency Range	2	-	52	GHz
Impedance	-	50	-	Ohms
Nominal Coupling	18.5	20	21.5	dB
Frequency Sensitivity	-	±0.9	±1.25	dB
Directivity	10	12	-	dB
Insertion Loss(Excluding coupling loss)	-	-	2.0	dB
Insertion Loss(True)	-	1.7	2.5	dB
VSWR Primary	-	1.5	1.7	:1
VSWR Secondary	-	1.5	1.7	:1
Average Power	20			W
Peak Power	300(10% Duty Cycle, 1μs Pulse Width)			W
Operating Temperature	-40°C~+85°C			
Storage Temperature	-50°C~+105°C			
Input/Output Connectors	2.4mm female			
Weight	45g			
Surface Finishing	Gray Paint			
Material	Aluminum			

Outline Drawing [mm[inch]]

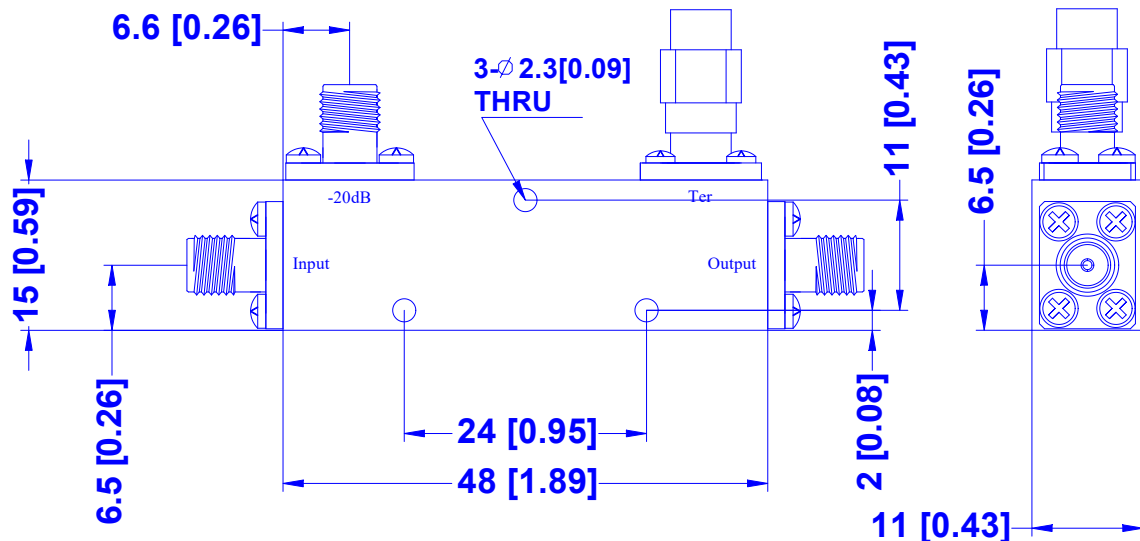

Tolerances ±0.5[0.02]