

TMDC-04000800-30S50 4-8 GHz, 30dB, 50W, SMA Female

FEATURES

- ❖ Wide Band Operation 4-8GHz
- ❖ Power Handle Capability up to 50W
- ❖ 30 dB Typical Coupling
- ❖ Low Insertion Loss


APPLICATIONS

- ❖ Frequency Measurements
- ❖ Signal Levelling, Signal Sampling
- ❖ Signal Injection
- ❖ Reflection Coefficient Measurements
- ❖ Measure incident and reflected power to determine VSWR

SPECIFICATIONS

Parameters	Min.	Typ.	Max.	Units
Frequency Range	4	-	8	GHz
Impedance	-	50	-	Ohms
Nominal Coupling	29	30	31	dB
Frequency Sensitivity	-	-	±1.0	dB
Directivity	18	-	-	dB
Insertion Loss(Excluding coupling loss)	-	-	0.4	dB
Insertion Loss(True)	-	-	-	dB
VSWR Primary	-	1.16	1.25	:1
VSWR Secondary	-	1.16	1.25	:1
Average Power	50			W
Peak Power	-			kW
Operating Temperature	-45°C~+85°C			
Storage Temperature	-50°C~+105°C			
Input/Output Connectors	SMA female&SMA male			
Weight	35g			
Surface Finishing	Gray/Black Paint			
Material	Aluminum			

Outline Drawing [mm[inch]]

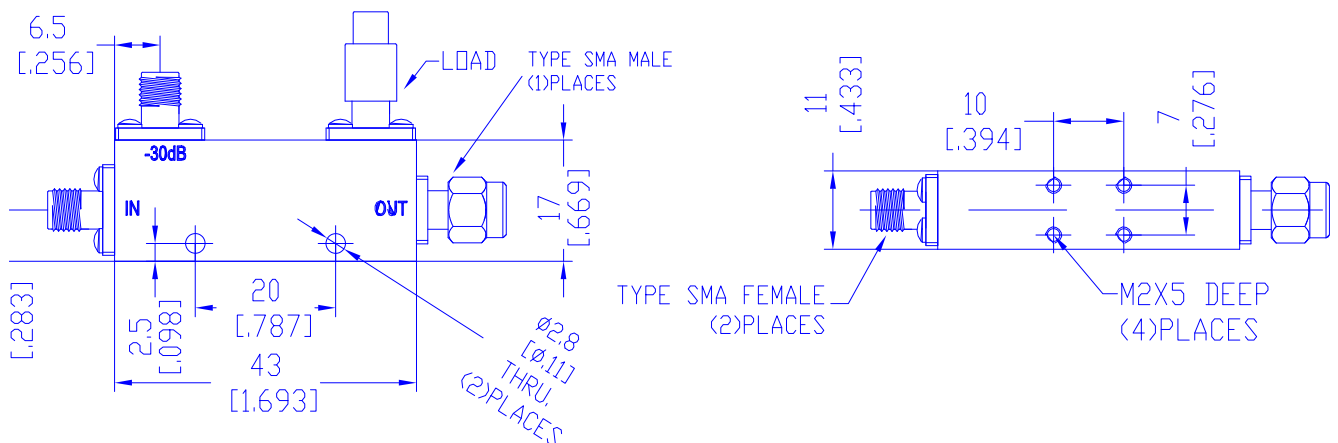

Tolerances ±0.5[0.02]