

**TMHC90-00500300-60S 0.5-3 GHz, 60W, SMA Female**

**FEATURES**

- ❖ Wide Band Operation 0.5-3 GHz
- ❖ Power Handle Capability up to 60W
- ❖ High Isolation Across Operational Band
- ❖ Low Insertion Loss
- ❖ Stable Performance Over Temperature


**APPLICATIONS**

- ❖ Commercial Wireless Communications
- ❖ Radar Systems
- ❖ Receivers Sytems
- ❖ Antenna Beam Forming
- ❖ Test Labs

**SPECIFICATIONS**

Parameters	Min.	Typ.	Max.	Units
Frequency Range	0.5	-	3	GHz
Impedance	-	50	-	Ohms
Nominal Coupling	-	3	-	dB
Insertion Loss	-	-	0.7	dB
Isolation	22	-	-	dB
Amplitude Balance	-	-	±0.5	dB
Phase Balance	-	-	±5	Deg
VSWR	-	-	1.2	:1
Average Power	-	-	60	W
Peak Power	-	-	1	kW
Operating Temperature	-40°C~+85°C			
Storage Temperature	-50°C~+105°C			
Input/Output Connectors	SMA female			
Weight	110g			
Surface Finishing	Black/Blue Paint			
Material	Aluminum			

**Outline Drawing [mm[inch]]**

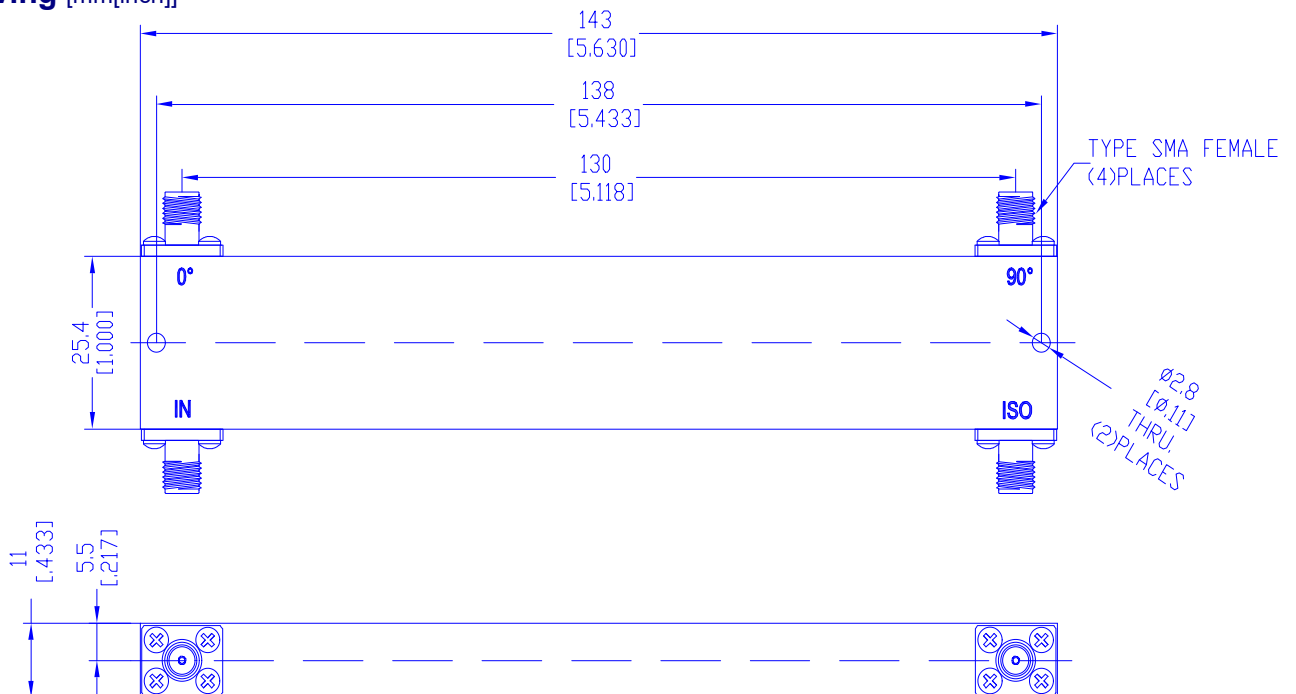

Tolerances ±0.5[0.02]