

TMHC90-02002650-20K 2.0-26.5 GHz, 20W, 2.92mm Female

FEATURES

- ❖ Wide Band Operation 2-26.5 GHz
- ❖ Power Handle Capability up to 20W
- ❖ High Isolation Across Operational Band
- ❖ Low Insertion Loss
- ❖ Stable Performance Over Temperature


APPLICATIONS

- ❖ Commercial Wireless Communications
- ❖ Radar Systems
- ❖ Receivers Systems
- ❖ Antenna Beam Forming
- ❖ Test Labs

SPECIFICATIONS

Parameters	Min.	Typ.	Max.	Units
Frequency Range	2	-	26.5	GHz
Impedance	-	50	-	Ohms
Nominal Split	-	3.01	-	dB
Insertion Loss	-	-	1.7	dB
Isolation	16	-	-	dB
Amplitude Balance	-	-	±0.8	dB
Phase Balance	-	-	±8	Deg
VSWR	-	-	1.5	:1
Average Power	-	-	20	W
Peak Power	-	-	1	kW
Operating Temperature	-40	-	+85	°C
Storage Temperature	-50	-	+105	°C
Input/Output Connectors	2.92mm female			
Weight	30g			
Surface Finishing	Black/Blue Paint			
Material	Aluminum			

Outline Drawing [mm[inch]]

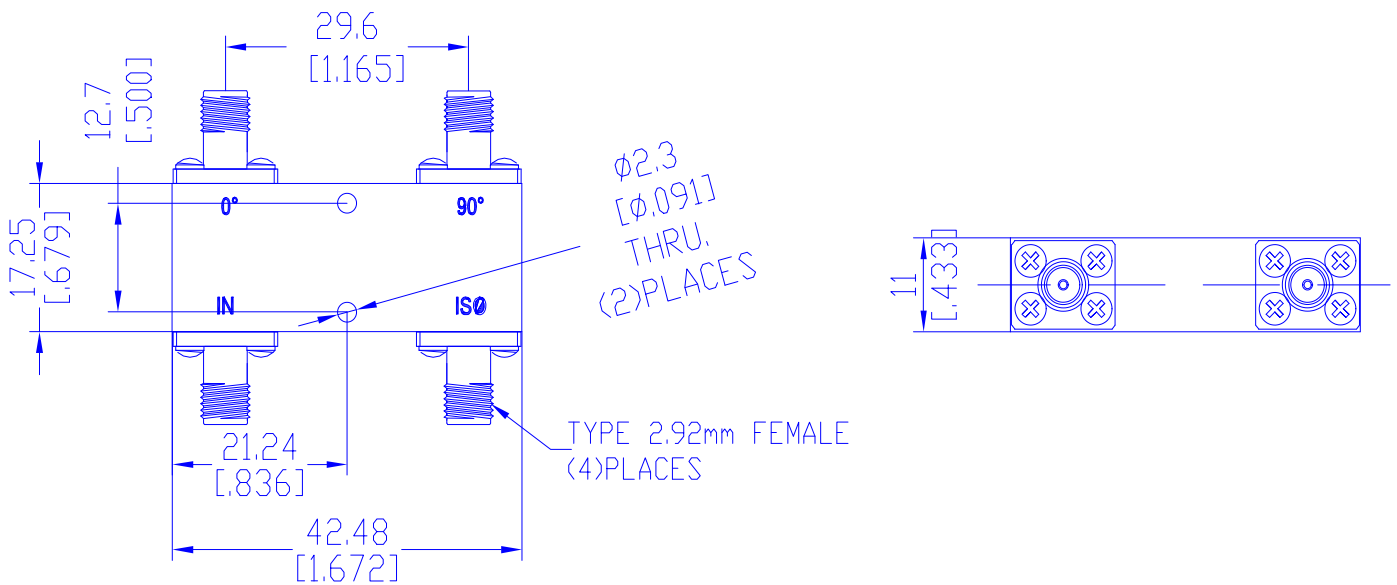

Tolerances ±0.5[0.02]