

TMHC90-03500800-50S 3.5-8.0 GHz, 50W, SMA Female

FEATURES

- ❖ Wide Band Operation 3.5-8.0 GHz
- ❖ Power Handle Capability up to 50W
- ❖ High Isolation Across Operational Band
- ❖ Low Insertion Loss
- ❖ Stable Performance Over Temperature


APPLICATIONS

- ❖ Commercial Wireless Communications
- ❖ Radar Systems
- ❖ Receivers Systems
- ❖ Antenna Beam Forming
- ❖ Test Labs

SPECIFICATIONS

Parameters	Min.	Typ.	Max.	Units
Frequency Range	3.5	-	8	GHz
Impedance	-	50	-	Ohms
Nominal Split	-	4.77	-	dB
Insertion Loss(Excluding coupling loss 1.76dB)	-	-	0.9	dB
Isolation	20	-	-	dB
Amplitude Balance	-	-	±0.8	dB
Phase Balance	-	-	±5	Deg
VSWR	-	-	1.4	:1
Average Power	-	-	50	W
Peak Power	-	-	1	kW
Operating Temperature	-40	-	+85	°C
Storage Temperature	-50	-	+105	°C
Input/Output Connectors	SMA female			
Weight	50g			
Surface Finishing	Black/Blue Paint			
Material	Aluminum			

Outline Drawing [mm][inch]

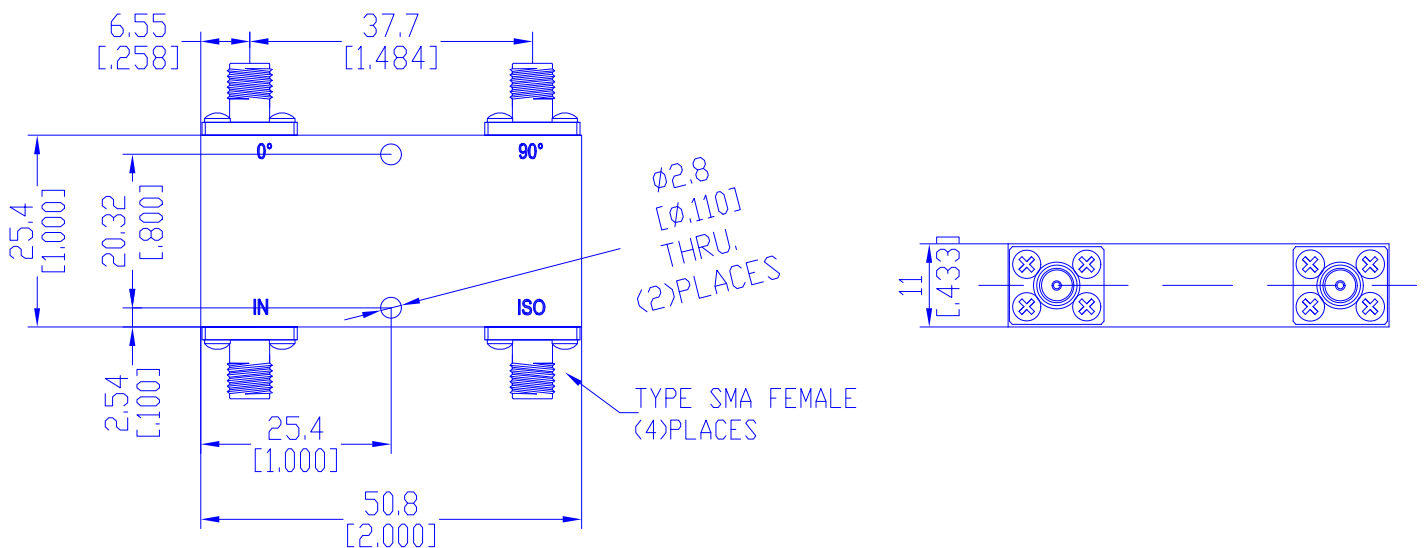

Tolerances ± 0.5 [0.02]