

TDDC-00501800-13S10 0.5-18 GHz, 13dB, 10W, SMA Female

FEATURES

- ❖ Wide Band Operation 0.5-18 GHz
- ❖ Power Handle Capability up to 10W
- ❖ 13 dB Typical Coupling
- ❖ Low Insertion Loss


APPLICATIONS

- ❖ Frequency Measurements
- ❖ Signal Levelling, Signal Sampling
- ❖ Signal Injection
- ❖ Reflection Coefficient Measurements
- ❖ Measure incident and reflected power to determine VSWR

SPECIFICATIONS

Parameters	Min.	Typ.	Max.	Units
Frequency Range	0.5	-	18	GHz
Impedance	-	50	-	Ohms
Nominal Coupling	12	13	14	dB
Frequency Sensitivity	-	-	±1.5	dB
Directivity	12	-	-	dB
Insertion Loss(Excluding coupling loss 0.23dB)	-	-	1.2	dB
VSWR Primary	-	-	1.4	:1
VSWR Secondary	-	-	1.4	:1
Power Handling	Incident	-	10	W
	Reflected	-	10	W
Operating Temperature	-40	-	+85	°C
Storage Temperature	-50	-	+105	°C
Input/Output Connectors	SMA-Female			
Weight	70g			
Dimensions	113mm×17mm×11mm			
Surface Finishing	Black/Blue Paint			
Material	Aluminum			

Outline Drawing [mm][inch]

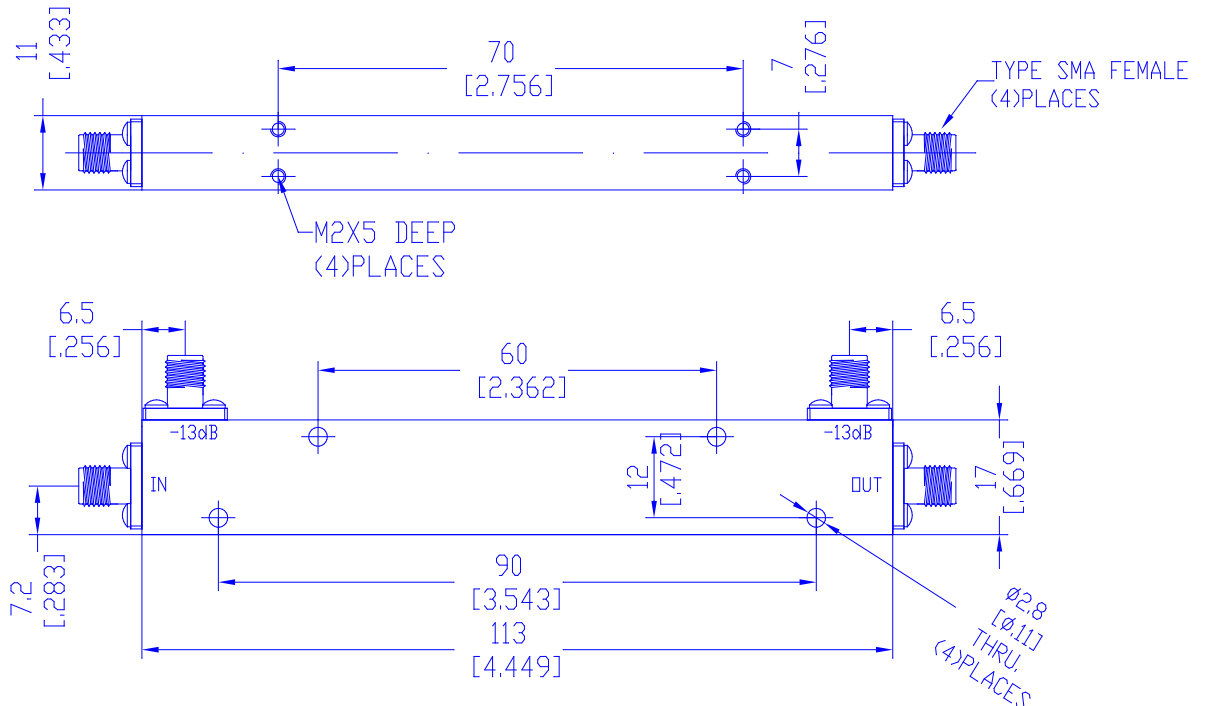

Tolerances ±0.5[0.02]