

## TDDC-02001800-10S10 2-18 GHz, 10dB, 10W, SMA Female

### FEATURES

- ❖ Wide Band Operation 2-18 GHz
- ❖ Power Handle Capability up to 10W
- ❖ 10 dB Typical Coupling
- ❖ Low Insertion Loss


### APPLICATIONS

- ❖ Frequency Measurements
- ❖ Signal Levelling, Signal Sampling
- ❖ Signal Injection
- ❖ Reflection Coefficient Measurements
- ❖ Measure incident and reflected power to determine VSWR

### SPECIFICATIONS

| Parameters                                     | Min.              | Typ. | Max. | Units |
|--|-------------------|------|------|-------|
| Frequency Range                                | 2                 | -    | 18   | GHz   |
| Impedance                                      | -                 | 50   | -    | Ohms  |
| Nominal Coupling                               | 9                 | 10   | 11   | dB    |
| Frequency Sensitivity                          | -                 | -    | ±1.0 | dB    |
| Directivity                                    | 12                | -    | -    | dB    |
| Insertion Loss(Excluding coupling loss 0.92dB) | -                 | -    | 1.5  | dB    |
| VSWR Primary                                   | -                 | -    | 1.5  | :1    |
| VSWR Secondary                                 | -                 | -    | 1.5  | :1    |
| Power Handling                                 | Incident          | -    | 10   | W     |
|  | Reflected         | -    | 10   | W     |
| Operating Temperature                          | -40               | -    | +85  | °C    |
| Storage Temperature                            | -50               | -    | +105 | °C    |
| Input/Output Connectors                        | SMA-Female        |      |      |       |
| Weight   | 90g               |      |      |       |
| Dimensions                                     | 88mm×19.05mm×11mm |      |      |       |
| Surface Finishing                              | Black/Blue Paint  |      |      |       |
| Material                                       | Aluminum          |      |      |       |

### Outline Drawing [mm][inch]

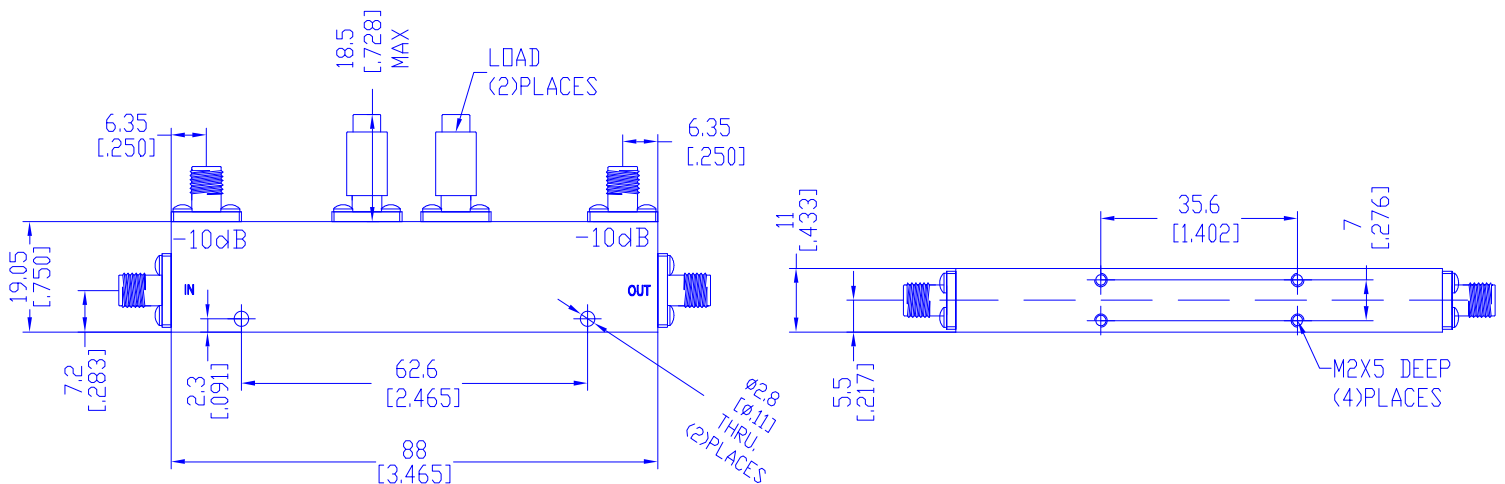

Tolerances  $\pm 0.5$  [0.02]