成都巨人微波
TITAN MICROWAVE INC.
- A Professional RF & Microwave Components Supplier -

Power Divider

TMPD8-00401800-30S

0.4-18 GHz, 30W, SMA Female, 8-Way

Specifications

Parameters		Min.	Typ.	Max.	Units
Frequency Range		0.4	-	18	GHz
Insertion Loss(excluding theoretical insertion loss 9.03dB)		-	-	8.0	dB
Amplitude Balance		-	-	±1.0	dB
Phase Balance		-	-	±9	Deg
VSWR(input port)		-	-	1.9	:1
VSWR(output ports)		-	-	1.5	:1
Isolation		16	-	-	dB
Impedance		-	50	-	Ohm
Power Handling	Forward	-	-	30	W
	Reversed	-	-	1	W
Operating Temperature		-55	-	+85	℃
RF Connectors		SMA-Female			
Surface Finishing		Black/Blue Painted			
Weight		1.16kg			

Outline Drawing[mm[inch]]

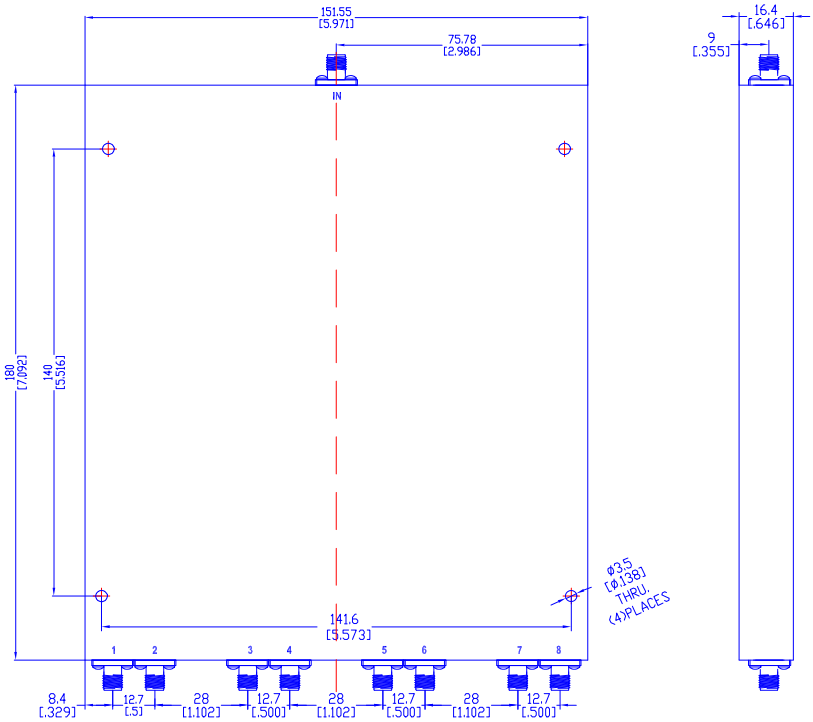

For RFQ please email to chris@titan-microwave.com