成都巨人微波
TITAN MICROWAVE INC.
- A Professional RF & Microwave Components Supplier -

Power Divider

TMPD8-00600270-30NS

0.6-2.7 GHz, 30W, N(f)-SMA(f), 8-Way

Specifications

Parameters		Min.	Typ.	Max.	Units
Frequency Range		0.6	-	2.7	GHz
Insertion Loss(excluding theoretical insertion loss 9.03dB)		-	-	1.8	dB
Amplitude Balance		-	-	±0.5	dB
Phase Balance		-	-	±5	Deg
VSWR(input port)		-	-	1.5	:1
VSWR(output ports)		-	-	1.3	:1
Isolation		18	-	-	dB
Impedance		-	50	-	Ohm
Power Handling	Forward	-	-	30	W
	Reversed	-	-	1	W
Operating Temperature		-55	-	+85	℃
RF Connectors		Input: N-Female, Output: SMA-Female			
Surface Finishing		Black/Blue Painted			
Weight		840g			

Outline Drawing [mm[inch]]

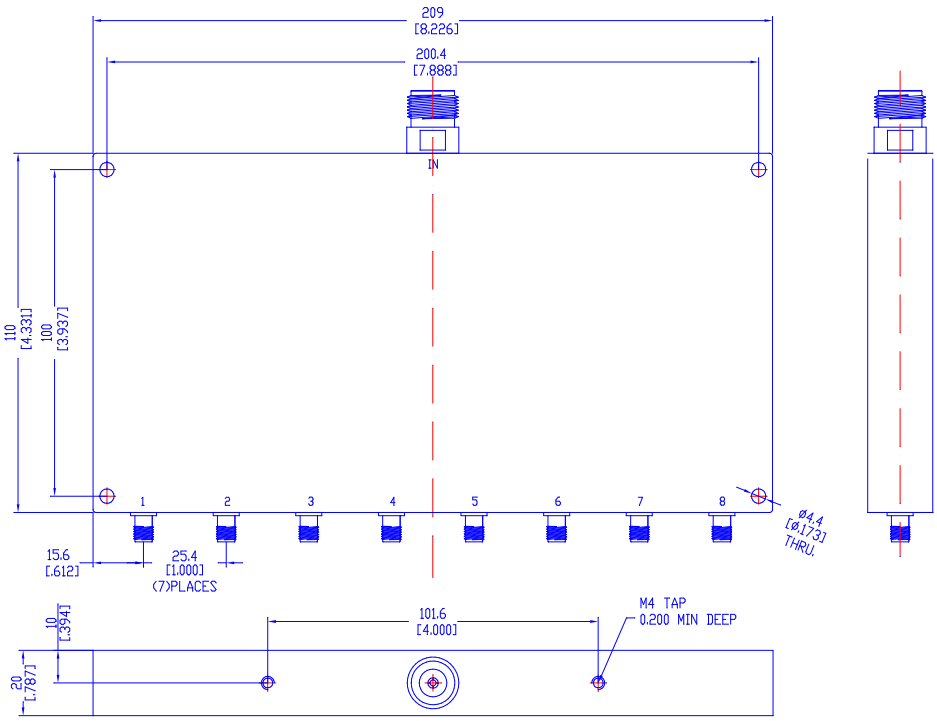

For RFQ please email to chris@titan-microwave.com