

**SPECIFICATIONS**

Frequency Range:	DC~18 GHz
Input Avg Power:	10W@25°C
Impedance:	50 Ohms
Attenuation:	1-40dB
VSWR:	1.30 max.
Connector:	SMA-Male to SMA-Female
Operating Temp.:	-55°C~+125°C
Connector Body:	Stainless Steel
Female Center Contact:	Gold plated beryllium copper
Male Center Contact:	Gold plated brass
Heat Sink:	Black anodized aluminum
Dimensions:	Ø10×34 mm
RoHS Status:	RoHS Compliant


**Maximum Deviation over Frequency**

Nominal ATTN(dB)	Frequency Range(GHz)			
	DC~4	DC~8	DC~12.4	DC~18
1-10	±0.4	±0.5	±0.6	±0.6
11-20	±0.5	±0.6	±0.7	±0.8
21-30	±0.6	±0.8	±0.8	±1.0
31-40	±0.7	±0.8	±0.9	±1.2
VSWR(Max.)	1.15	1.15	1.25	1.3

**Ordering Information**

<b>TMFA18</b>	<b>X</b>	<b>S</b>	<b>10 A</b>	<b>-</b>	<b>XX</b>
					XX: Attenuation dB value
					Average Power(W)
					RF Connector (S: SMA-Male to SMA-Female)
					X: Maximum Frequency(GHz) 08: DC~8 GHz 12: DC~12.4 GHz 18: DC~18 GHz
					Titan Microwave Fixed Attenuator

**Power/Temp Rating Curve**

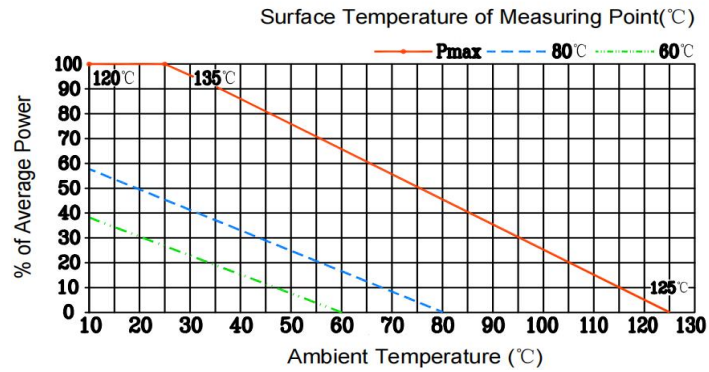

**Dimensions [mm]**

