

SPECIFICATIONS

Frequency Range:	DC~18 GHz
Input Avg Power:	20W@25°C
Impedance:	50 Ohms
Attenuation:	1-50dB
VSWR:	1.45 max.
Connector:	N-Male to N-Female
Operating Temp.:	-55°C~+125°C
Connector Body:	Stainless Steel
Female Center Contact:	Gold plated beryllium copper
Male Center Contact:	Gold plated brass
Heat Sink:	Black Anodized Aluminum
Dimensions:	Ø38×49.5 mm
RoHS Status:	RoHS Compliant


Maximum Deviation over Frequency

Nominal ATTN(dB)	Frequency Range(GHz)			
	DC~4	DC~8	DC~12.4	DC~18
1-10	±0.4	±0.5	±0.6	±0.6
11-20	±0.5	±0.6	±0.7	±0.8
21-30	±0.6	±0.8	±0.8	±1.0
31-40	±0.7	±0.8	±0.9	±1.2
41-50	±0.7	±0.8	±1.1	±1.3
VSWR(max)	1.2	1.25	1.35	1.45

Ordering Information

TMFA18	X	N	20	-	XX
					XX: Attenuation dB value
					Average Power(W)
					RF Connector (N: N-Male to N-Female)
					X: Maximum Frequency(GHz) 08: DC~8 GHz 12: DC~12.4 GHz 18: DC~18 GHz
					Titan Microwave Fixed Attenuator

Power/Temp Rating Curve

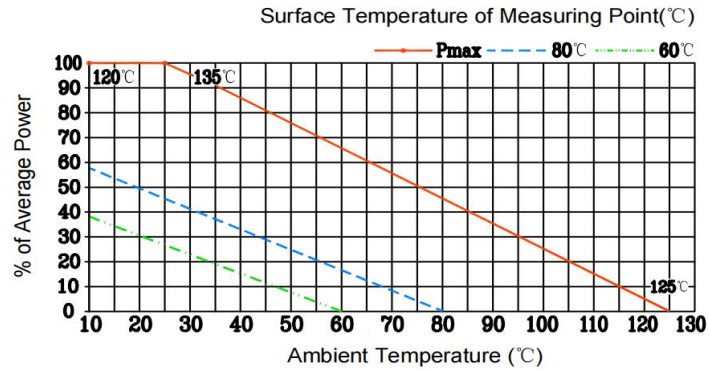

Dimensions [mm]

