

**SPECIFICATIONS**

Frequency Range:	DC~6 GHz
Input Avg Power:	25W@25°C
Impedance:	50 Ohms
Attenuation:	1-50dB
VSWR:	1.25 max.
Connector:	BNC-Male to BNC-Female
Operating Temp.:	-55°C~+125°C
Female Center Contact:	Gold plated beryllium copper
Male Center Contact:	Gold plated brass
Heat Sink:	Black Anodized Aluminum
Dimensions:	Ø44×54 mm
RoHS Status:	RoHS Compliant


**Maximum Deviation over Frequency**

Nominal ATTN(dB)	Frequency Range(GHz)			
	DC~3	DC~6	-	-
1-10	±0.4	±0.5	-	-
20	±0.5	±0.6	-	-
30	±0.7	±0.8	-	-
40-50	±0.7	±0.8	-	-
VSWR(max)	1.2	1.25	-	-

**Ordering Information**

<b>TMFA6</b>	<b>X</b>	<b>B</b>	<b>25</b>	<b>-</b>	<b>XX</b>
					XX: Attenuation dB value
					Average Power(W)
					RF Connector (B: BNC-Male to BNC-Female)
					X: Maximum Frequency(GHz) 03: DC~3 GHz 06: DC~6 GHz
					Titan Microwave Fixed Attenuator

**Power/Temp Rating Curve**

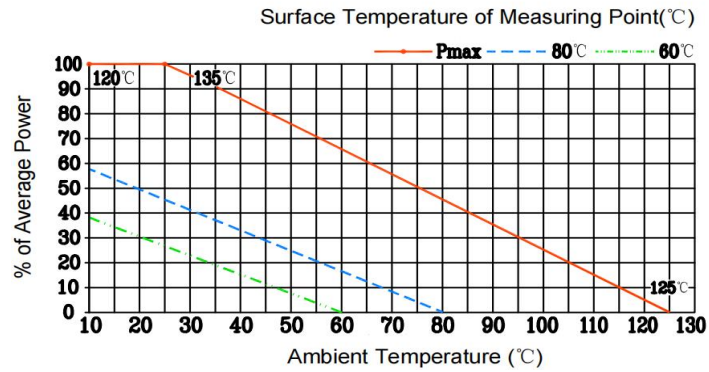

**Outline Drawing[mm]**

