


SPECIFICATIONS

Frequency Range:	DC~18 GHz
Input Avg Power:	50W@25°C
Impedance:	50 Ohms
Attenuation:	1-50dB
VSWR:	1.45 max.
Connector:	TNC-Male to TNC-Female
Operating Temp.:	-55°C~+125°C
Female Center Contact:	Gold plated beryllium copper
Male Center Contact:	Gold plated brass
Heat Sink:	Black Anodized Aluminum
Dimensions:	Ø64×70 mm
RoHS Status:	RoHS Compliant


Power/Temp Rating Curve

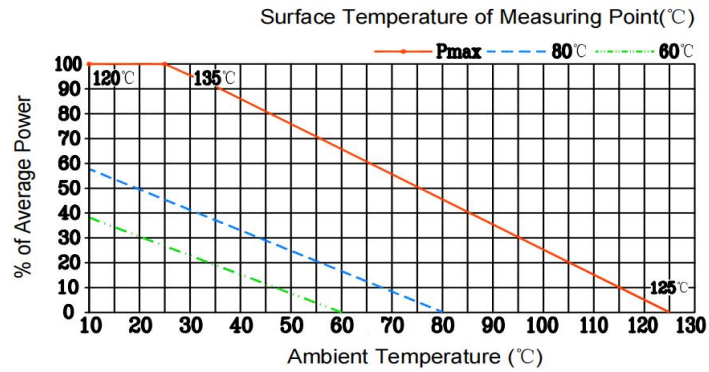

Maximum Deviation over Frequency

Nominal ATTN(dB)	Frequency Range(GHz)			
	DC~4	DC~8	DC~12.4	DC~18
1-10	±0.4	±0.5	±0.6	±0.8
20	±0.5	±0.6	±0.7	±0.9
30	±0.7	±0.8	±0.8	±1.1
40-50	±0.7	±0.8	±1.1	±1.3
VSWR(max)	1.2	1.25	1.35	1.45

Outline Drawing [mm]

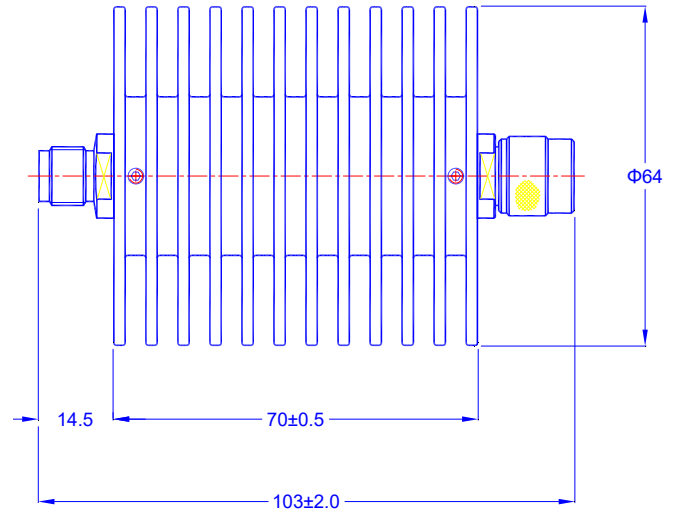

Ordering Information

TMFA18	X	T	50	-	XX
					XX: Attenuation dB value
					Average Power(W)
					RF Connector (T: TNC-Male to TNC-Female)
					X: Maximum Frequency(GHz) 08: DC~8 GHz 12: DC~12.4 GHz 18: DC~18 GHz
					Titan Microwave Fixed Attenuator